

**PLEASE CHECK WEB SITE AT WWW.ONBOARDSYSTEMS.COM FOR
THE LATEST REVISION OF THIS MANUAL**

Owner's Manual
For the
**Cargo Hook Swing
Suspension System**
On the
Airbus Helicopters AS350 Series

System Part Number
200-280-01

STC SR01164SE

*Owner's Manual Number 120-104-01
Revision 17
05/09/14*



13915 NW 3rd Court Vancouver, Washington 98685 USA
Phone: 360-546-3072 Fax: 360-546-3073 Toll Free: 800-275-0883
www.OnboardSystems.com

This page intentionally left blank.

Record of Revisions

<i>Revision</i>	<i>Date</i>	<i>Page(s)</i>	<i>Reason for Revision</i>
9	06/20/08	2-13	Corrected ME10E wire connection point in electrical schematic (Figure 2.4.7).
10	10/30/08	2-20	Added note to allow alternate placard background.
11	3/10/10	2-9 to 2-22 & 6-2	Updated manual to reflect new load weigh harness configuration. Clarified manual release cable rigging instructions including Figure 2.6.4. Updated note regarding EMI test at installation check-out.
12	04/14/10	6-10 to 6-12	Updated part numbers for P/N 232-145-01 in System Part Numbers section including changing load cell part no. to 210-249-00.
13	08/31/10	TOC, Section 1, 2 & 4, 3-8, 3-9, 3-12 & 6-2	Replaced warnings, cautions and notes section with safety labels sections. Updated safety label format to current format throughout document. Added fuel drain guard to kit and associated instructions. Updated weight for fixed provisions to included fuel drain guard kit.
14	01/21/11	5-1 & 6-12	Replaced bolt (P/N 510-505-00) with bolt (P/N 510-762-00) in swing frame assembly parts list. Updated RMA instructions.
15	03/21/11	6-10 & 6-12	Added Fuel Drain Warning Placard to System Parts Numbers section under swing hook/frame assembly.
16	05/02/11	1-5	Added Half Clamp Pad (EC P/N 350A-41-1099-20) to the table of Eurocopter required part numbers.
17	05/09/14	Title, 1-1, 1-4, 1-5, 1-7, Section 2, 4-3, 4-4, 6-2, & 6-12	Updated Eurocopter to Airbus Helicopters. Replaced load cell P/N 210-249-00 with P/N 210-249-03. Replaced fuel drain guard P/N 290-889-00 with P/N 290-889-01. Updated aircraft side of electrical schematics. Updated Figure 4.4.

Register Your Products for Automatic Notifications

Onboard Systems offers a free notification service via fax or email for product alerts and documentation updates. By registering your Onboard Systems products at our website, we will be able to contact you if a service bulletin is issued, or if the documentation is updated.

You can choose to receive notices on an immediate, weekly, or monthly schedule via fax, email or both methods. There is no charge for this service. Please visit our website at www.onboardsystems.com/notify.php to get started.

This page intentionally left blank.

CONTENTS

Section 1 **General Information**

- Introduction, 1-1
- Safety Labels, 1-2
- Specifications, 1-3
- Inspection, 1-3
- Bill of Materials, 1-4
- Theory of Operation, 1-6

Section 2 **Installation Instructions**

- Shackle Assembly Installation, 2-1
- Fixed Manual Release Cable Assembly Installation, 2-2
- Cockpit Indicator Installation, 2-7
- Electrical Wiring Installation, 2-9
- Fuel Drain Guard Installation, 2-16
- Swing Suspension Installation, 2-22
- Removable Manual Release Cable Assembly Installation, 2-23
- External Electrical Release and Load Cell Cable Installation, 2-26
- Placard Installation, 2-28
- Installation Check-Out, 2-29
- Component Weights, 2-30
- Paper Work, 2-30

Section 3 **Load Weigh Systems Operation Instructions**

- Indicator Front Panel, 3-1
- The Run Mode, 3-2
 - To Zero or Tare the Display, 3-3
 - To Un-Zero the Display, 3-3
 - Error Codes, 3-4
- The Setup Mode, 3-5
 - Indicator Dampening, 3-7
 - To look at, or change the dampening level, 3-7
 - Indicator Calibration, 3-8
 - To look at or change the calibration code, 3-8
 - Installation Zero, 3-9
 - To run the installation zero routine, 3-9
 - Calibration by Lifting a Known Weight, 3-9
 - To run calibration by known weight routine, 3-10
 - Setting the Scale on a Remote Analog Meter, 3-11
 - To look at or change the scale, 3-11
 - Select KG or LB Units, 3-12
 - To look at or change the units, 3-12
 - Indicator Version, 3-13

CONTENTS, continued

***Section 4* Operation Instructions**

Operating Procedures, 4-1
Disconnecting Removable Provisions, 4-2
Cargo Hook Loading, 4-3
Cargo Hook Rigging, 4-3

***Section 5* Maintenance**

Instructions for Returning a System to the Factory, 5-1

***Section 6* System Part Numbers**

210-201-01 AS 350 Swing Removable Provisions, 6-1
210-202-01 AS 350 Swing Fixed Provisions, 6-2
232-137-01 Shackle Assembly, 6-3
232-150-00 Release handle assembly, 6-4
232-151-00 Quick Disconnect Support assembly, 6-5
232-140-01 Forward Attach Cable Assembly, 6-6
232-141-01 Aft Attach Cable Assembly, 6-7
232-142-00 Lower Attach Cable Gimbal Assembly, 6-8
232-143-01 Load Cell Gimbal Assembly, 6-9
232-145-01 Swing Hook-Frame Assembly, 6-10

***Section 7* Certification**

FAA STC, 7-1
Canadian Approval, 7-2
Brazilian CHST, 7-3
EASA STC, 7-9

Section 1

General Information

Introduction

The P/N 200-280-01 Cargo Hook Swing Suspension System kit consists of fixed provisions (P/N 210-201-01) and removable provisions (P/N 210-202-01). The fixed provisions are permanently installed on the aircraft while the removable provisions are easily removed when not required on the helicopter's mission.

These kits are approved for installation on Airbus Helicopters AS350B, AS350BA, AS350D, AS350B1, AS350B2, and AS350B.

Newer Cargo Hook Swing Suspension System kits (kits shipped after August 2010) include a fuel drain guard which is compatible with fuel tanks on AS350 B2 and B3 helicopters and on AS350B, B1, BA, and D models that have been retrofitted with the B-2 style dual fuel pump type tank. The Airbus Helicopters part number for this tank is 350A55-1015-0251. The fuel drain guard is intended for helicopters with their fuel drain levers previously modified per AD 2005-03-08. See Theory of Operation section for description of fuel drain guard.

Safety Labels

The following definitions apply to safety labels used in this manual.



Indicates a hazardous situation which, if not avoided, will result in death or serious injury.



Indicates a hazardous situation which, if not avoided, could result in death or serious injury.



Indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.



Draws the reader's attention to important or unusual information not directly related to safety.



Used to address practices not related to personal injury.

Specifications

Table 1.1 Suspension System Specifications

Design load	3,086 lbs. (1400 kg.)
Design ultimate strength	11,574 lbs. (5250 kg.)
Unit weight - Fixed Provisions	5.4 lbs. (2.2 kg.)
Unit weight - Removable Provisions	30 lbs. (13.6 kg.)

Table 1.2 P/N 528-023-01 Cargo Hook Specifications

Design load	3,500 lbs. (1,587 kg.)
Design ultimate strength	13,125 lbs. (5,953 kg.)
Electrical release capacity	8,750 lbs. (3,969 kg.)
Mechanical release capacity	8,750 lbs. (3,969 kg.)
Force required for mechanical release at 3,500 lb.	8 lb. Max. (.600" travel)
Electrical requirements	22-32 VDC 6.9 – 10 amps
Minimum release load	0 pounds
Unit weight	3.0 pounds (1.35 kg.)
Mating electrical connector	PC06A8-2S SR



Load capacities given are for the equipment described only. Loading limits for your particular helicopter model still apply. Consult your flight manual.

Inspection

Inspect the kit items for evidence of damage, corrosion and security of lock wire and fasteners. If damage is evident, do not use the items until they are repaired.

Bill of Materials

The following items are included with the 200-280-01 Swing Suspension System, the 210-202-01 fixed provisions kit, and the 210-201-01 removable provisions kit. If shortages are found contact the company from whom the system was purchased.

Table 1.3 Onboard Systems Bill of Materials

Part Number	Description	Total Kit Qty 200-280-01	Fixed Kit Qty 210-202-01	Removable Kit Qty 210-201-01
120-104-01	Owner's Manual	1	1	1
121-012-01	RFMS	1	1	1
122-005-00	Cargo Hook Service Manual	1	-	1
123-011-01	ICA	1	1	1
210-095-00	C-39 Indicator	1	1	-
210-095-04**	C-39 Indicator, NVG Lights	1	1	-
215-165-00	AS 350 Multiple Decal Sheet	1	1	-
215-166-00	Max Hook Load 3086 Decal	1	-	1
215-168-00	Max Hook Load 2557 Decal	1	-	1
232-137-01	Shackle Assembly	4	4	-
232-150-00	Release Handle Assembly	1	1	-
232-151-00	Fixed Quick Disconnect Assembly	1	1	-
232-140-01	Forward Attach Cable Assembly	2	-	2
232-141-01	Aft Attach Cable Assembly	2	-	2
232-145-01	Hook-Frame Assembly	1	-	1
268-024-02	Manual Release Cable Assembly	1	-	1
270-106-02	LW Internal Harness	1	1	-
270-108-00	Release Internal Harness	1	1	-
270-125-00	Ground Strap, Fixed	1	1	-
290-772-00	Indicator Mount bracket	1	1	-
290-780-00	Attachment Bracket	1	1	-
290-782-00	Connector Bracket	1	1	-
290-783-00	Relay Bracket	1	1	-
290-888-00*	Retainer	1	1	-
290-889-01*^	Guard	1	1	-
290-893-00*	Bracket	1	1	-
445-005-00	Relay	1	1	-
500-065-00	Grommet Edging	1	1	-
510-029-00	Nut	8	8	-
510-042-00	Washer	2	2	-
510-062-00	Washer	8	8	-
510-095-00	Washer	3	3	-
510-102-00	Nut	4	4	-
510-277-00	Screw	2	2	-
510-278-00	Washer	2	2	-
510-279-00	Nut	2	2	-
510-453-00	Bolt	2	2	-
510-085-00	Washer	2	2	-
510-455-00	Bolt	2	2	-
510-457-00	Screw	4	4	-
510-475-00	Screw	3	3	-
510-481-00	Screw	8	8	-
510-526-00*	Cotter Pin	2	2	-
512-024-00	Adel Clamp	2	2	-
610-024-00*	Seal	1	1	-

* Fuel drain guard component, included with kits shipped after August 2010.

^Fuel drain guard P/N 290-889-01 supersedes fuel drain guard P/N 290-889-00.

** *The 210-095-04 Indicator is equipped with NVG compatible lights. It is an optional indicator that can be ordered in place of the 210-095-00 Indicator.*

Bill of Materials *continued*

The following is needed for installation of the fuel drain guard and is not included with the kit and should be obtained before installation is begun.

Table 1.4 Needed Supplies

Part Number	Description	Quantity
PR1422-B	Sealant	AR

To complete the cargo hook installation the following Airbus Helicopters parts may be necessary to obtain (these parts are frequently found to be on the aircraft from the factory or are standard Airbus Helicopters parts).



These items may or may not be installed with a standard aircraft, therefore verification is recommended before purchasing them.

Table 1.5 Airbus Helicopters Part Numbers

Airbus Helicopters P/N	Description	Qty
22201BE120074L	Screw	4
23111AG120LE	Washer	8
ASN52320BH120N	Nut	4
DHS751-160.62	Grommet	1
SL211M5-1	Nut	3
A3125-2 H179	Quick Disconnect Clamp	2
350A-41-1097-20	Half Clamp, Rear	2
350A-41-1099-20	Half Clamp Pad	2
350A86-0020-33	Bracket	1
ASNA0078A403	Rivet	3

The cargo hook electrical system interfaces with the aircraft's electrical panel. Earlier versions (pre-mod. #07-3274) of the AS350 utilize a fuse type switch panel. The following electrical panel components for these versions are typically found to be on the aircraft, but may be necessary to obtain.

Table 1.6 Airbus Helicopters Electrical Parts – Pre-mod. #07-3274

Airbus Helicopters P/N	Description	Qty
DHS775-160-42	Indicator Light Body	1
DHS775-240-22	Indicator Light	1
EN2240-6839	Lamp	4
DI-2-5*	Fuse 2.5A	1
DA8-16A*	Fuse 16A	1

AS350B2 and B3 aircraft with modification #07-3274 incorporated utilize a circuit breaker type switch panel. The following electrical panel components for these versions are typically found to be on the aircraft, but may be necessary to obtain.

Table 1.7 Airbus Helicopters Electrical Parts – with Mod. #07-3274

Airbus Helicopters P/N	Description	Qty
045004A127A	Cargo Hook Sling Switch	1
ECS0744A02A5	Circuit Breaker 2.5A	1
ECS0744B15A0	Circuit Breaker 15A	1

Theory of Operation

The 200-280-01 Cargo Hook Swing Suspension System is composed of:

- A suspended pyramid frame that supports the cargo hook.
- An electrical release system that provides means for release by pilot actuation of the push-button switch in the cockpit. When the push-button switch is pressed, it energizes the DC solenoid in the cargo hook, and the solenoid opens the latch in the internal mechanism.
- A manual release system, which provides a means of releasing a cargo hook load in the event of an electrical release system failure. A lever mounted to the collective stick actuates it.
- Ground personnel may also release a load by the actuation of a lever located on the side of the cargo hook.
- A load weigh system, which is comprised of an indicator mounted to the RH door pillar within the cockpit connected to a load cell between the cargo hook and frame.

A load is attached to the cargo hook by passing a cargo sling ring into the throat of the load beam and pushing the ring against the upper portion of the load beam throat, which will initiate the hook to close. In the closed position, a latch engages the load beam and latches it in this position.

To release the load, the latch is disengaged from the load beam. With the latch disengaged, the weight of the load causes the load beam to swing to its open position, and the cargo sling ring slides off the load beam. The load beam then remains in the open position awaiting the next load.

The Cargo Hook Swing Kit includes a fuel drain guard. The fuel drain guard protects the fuel drain valve on the helicopter from accidentally being opened or damaged by the cargo swing. The fuel drain valve is located on the bottom of the fuel tank and extends below the belly skin of the helicopter. In this position it is vulnerable to damage or uncommanded opening. The most common occurrence of the cargo hook swing suspension striking the fuel drain valve happens when the helicopter lands on snow or on uneven terrain. The swing has limited ground clearance and when the skid gear sinks into the snow, the swing suspension is pushed upward into the fuel drain valve, opening it and causing fuel to drain. The fuel drain valve can also be opened in flight by the swing suspension flying vertically due to aerodynamics when ferrying with no load or from recoil effect from releasing large cargo hook loads.

Theory of Operation continued

The 200-280-01 system features several improvements over the previous 200-280-00 system.

- The swing frame now has an additional gimbal near where the hook attaches and spherical rod ends on the sides. This allows the frame to distribute the loads between the four cables more effectively. As the swing moves from side to side under the helicopter the four cables all describe their own arcs. With a load applied to a rigid swing frame, something has to give to accommodate this geometry. This can be observed by moving our gimballed swing frame side to side under the helicopter and watching the gimballed joint and the parallelism of the frame tubes. You will notice that the frame flexes to match the paths of the cable ends.

With a rigid frame, such as supplied by Airbus Helicopters, swinging side to side with no load you will notice that one or more of the cables goes slack. With a load on the hook, the cables don't go slack and the geometry is accommodated by flexure of the swing frame and the airframe. The more rigid the swing frame is the more loads get transferred to the airframe. It is this principal that lead to the articulated swing frame of the current design. This allows reduction of the stresses in both the airframe and the swing frame to a minimum.

- The swing frame supporting cables are now a simplified design with fewer parts and less weight.
- The attach fittings have been redesigned with larger replaceable bushings for longer life and more economical service.
- The manual release cable housing is made from a new material that is more durable and flexible. This is to provide longer cable life.
- A ground strap has been added for static discharge. This reduces the possibility of static discharge grounding through the manual release cable.

This page intentionally left blank.

Section 2

Installation Instructions

These procedures are provided for the benefit of experienced aircraft maintenance facilities capable of carrying out the procedures. They must not be attempted by those lacking the necessary expertise.

2.1 Shackle Assembly Installation

Airbus Helicopters landing gear fittings (P/N 350A41-1097-20) are standard on B3 and optional on earlier models. If not present, install per Airbus Helicopters modification 07-2772.

Attach the four Shackle Assemblies (P/N 232-137-01) to the helicopter landing gear fittings with hardware as illustrated in Figure 2.1.1 (Airbus Helicopters part numbers are shown in italics) except at the RH forward hard point install an Attachment Bracket at the inboard side as illustrated in Figure 2.1.2. Note the orientation of the Shackle Assembly. Torque the nuts to 100-130 in-lbs.

At the Attachment Bracket fasten an Adel Clamp (P/N 512-024-00) with hardware as illustrated, do not torque nut down until manual release cable is routed through (see section 2.2).

Figure 2.1.1 Shackle Assembly Installation


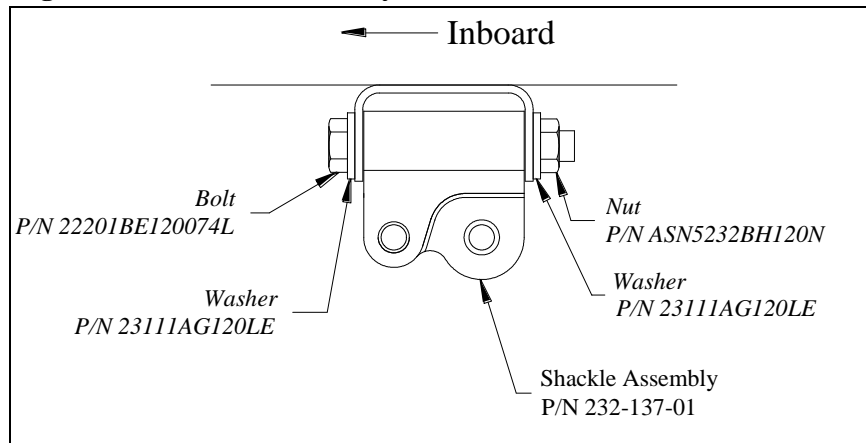


Figure 2.1.2 RH Forward Shackle Assembly Installation

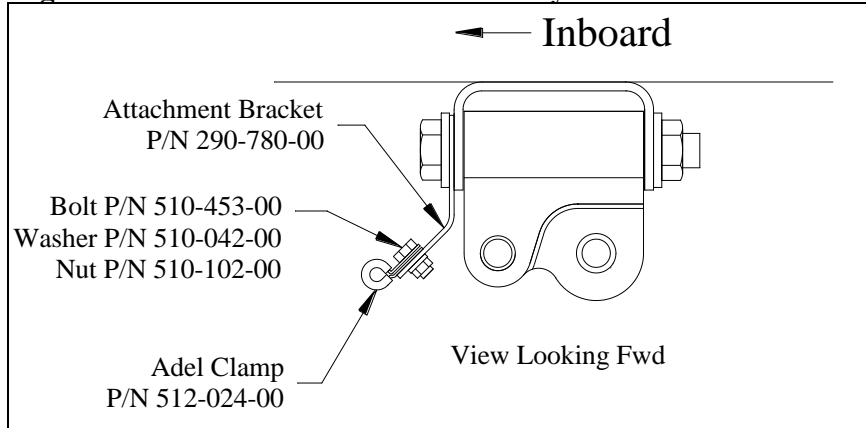


2.2 Fixed Manual Release Cable Assembly Installation

Remove the lower fairings on the helicopter in order to obtain access to cable routing areas.

The manual release cable installation consists of a fixed section (P/N 268-025-00) and a removable section. The fixed section is routed from the release lever at the collective, aft to an external bracket attached to the lower rear fairing, at the centerline of the forward fuel tank support frame (as shown in Figure 2.2.1). Figure 2.2.1 is an overview of the cable routing and the figures following detail the cable support installations at various points.


Figure 2.2.1 Fixed Manual Release Cable Installation Overview

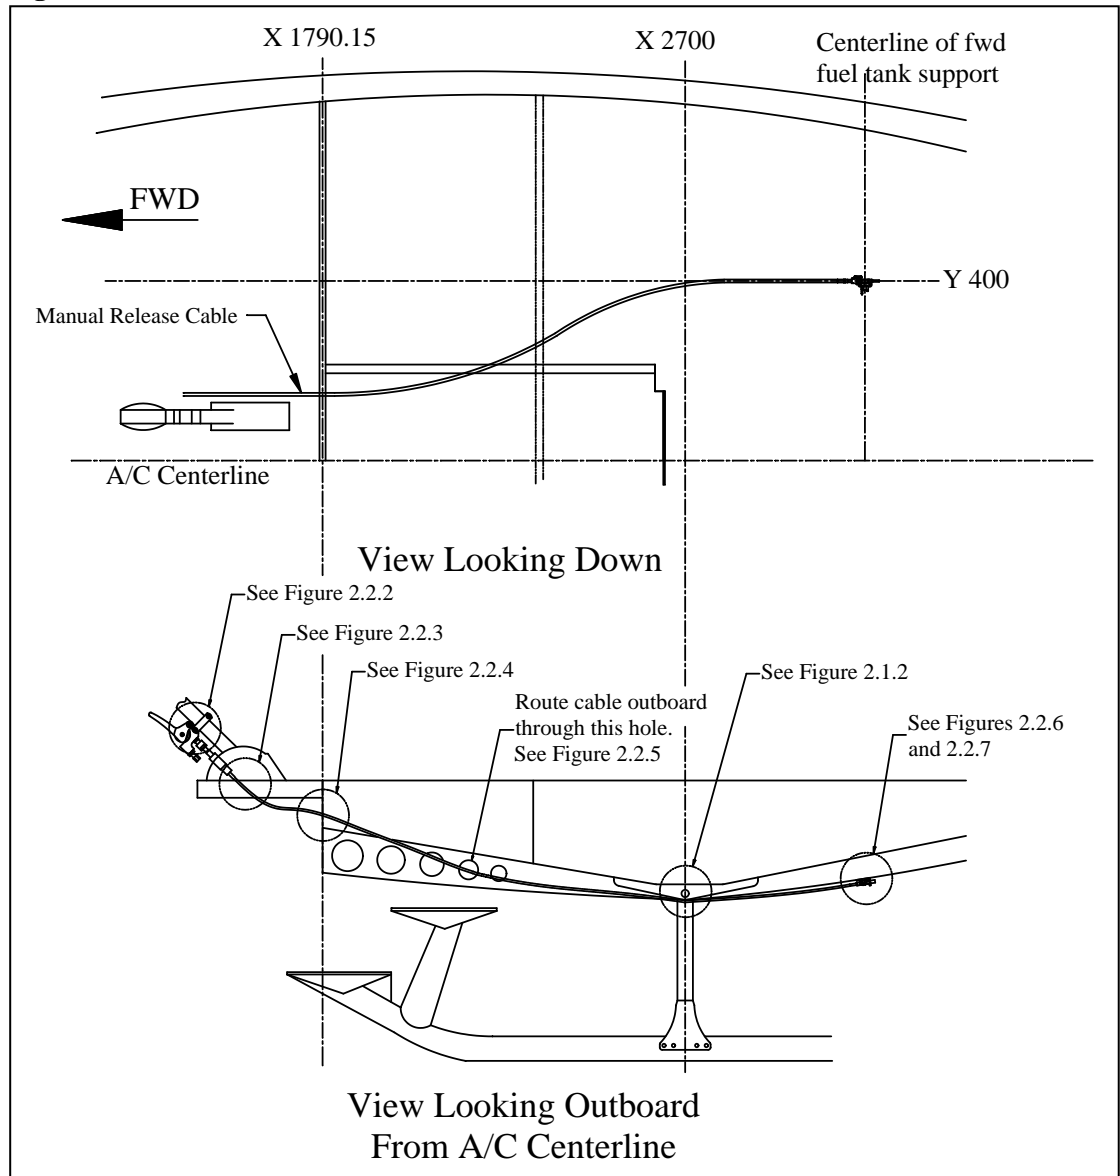

2.2 Fixed Manual Release Cable Assembly Installation *continued*

- Mount the manual release lever (assembly P/N 232-138-00) to the collective shaft with the Clamp Half and two screws (P/N 510-390-00) provided pre-assembled on the release lever assembly, as illustrated below.


Figure 2.2.2 Manual Release Lever Installation

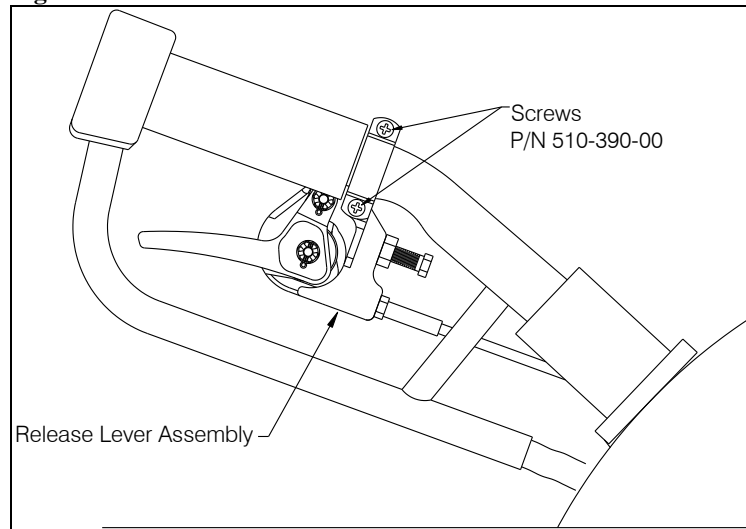

- Route the cable to underneath the cabin floor through the existing slot by removing the grommet to allow the cable end fitting to be fed through. Re-install the grommet.

If the slot in floor does not exist, create one with dimensions as shown below in the cabin floor 43 mm from the collective pitch lever unit and 150 mm forward of X1790.15 (see below) and install the grommet (Airbus Helicopters P/N DG-38).


Figure 2.2.3 Cabin Floor Hole Detail

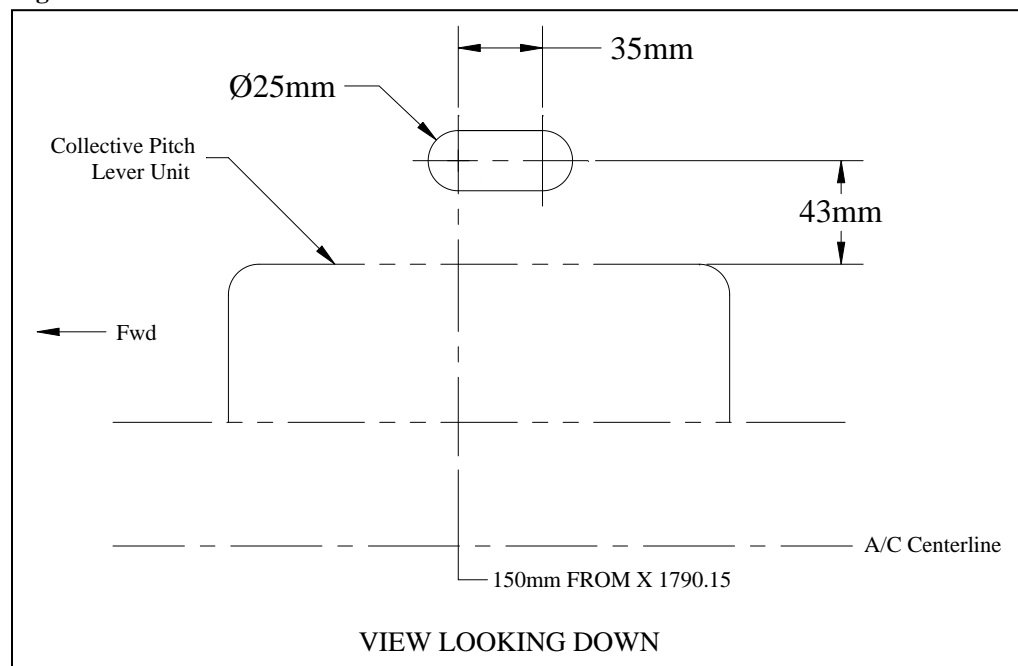

2.2 Fixed Manual Release Cable Assembly Installation *continued*


- Underneath the floor, route the manual release cable through an existing hole in the frame immediately aft of the collective. Secure the cable at this point with an adel clamp (P/N 512-024-00). Fasten the adel clamp to the existing bracket (Airbus Helicopters P/N 350A86-1051-00) with hardware as illustrated below.

Figure 2.2.4 Cable Routing Through Frame

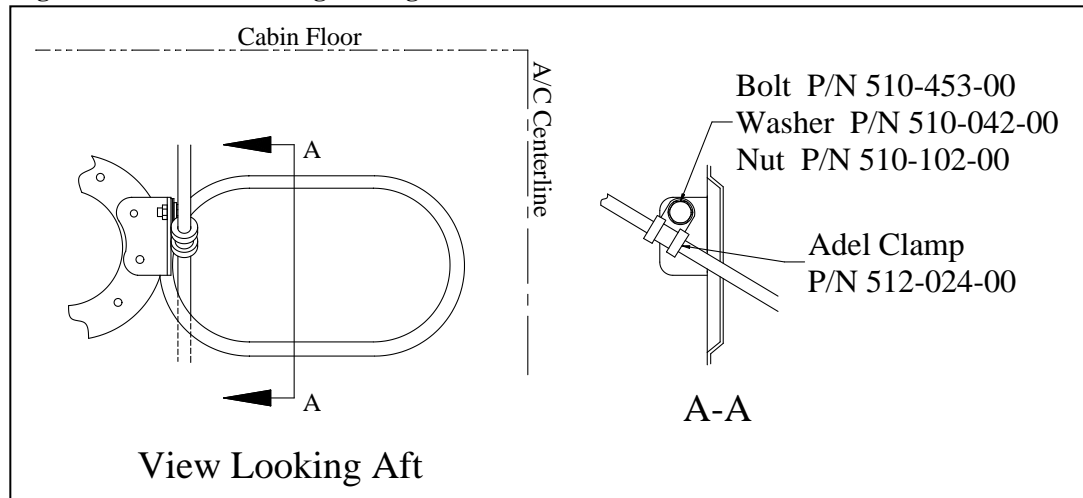

- Aft of the frame, route the cable outboard through the hole in the structural member as shown in Figure 2.2.1 and Figure 2.2.5 and install Plastic Edging Grommet (P/N 500-065-00).

Figure 2.2.5 Grommet Installation

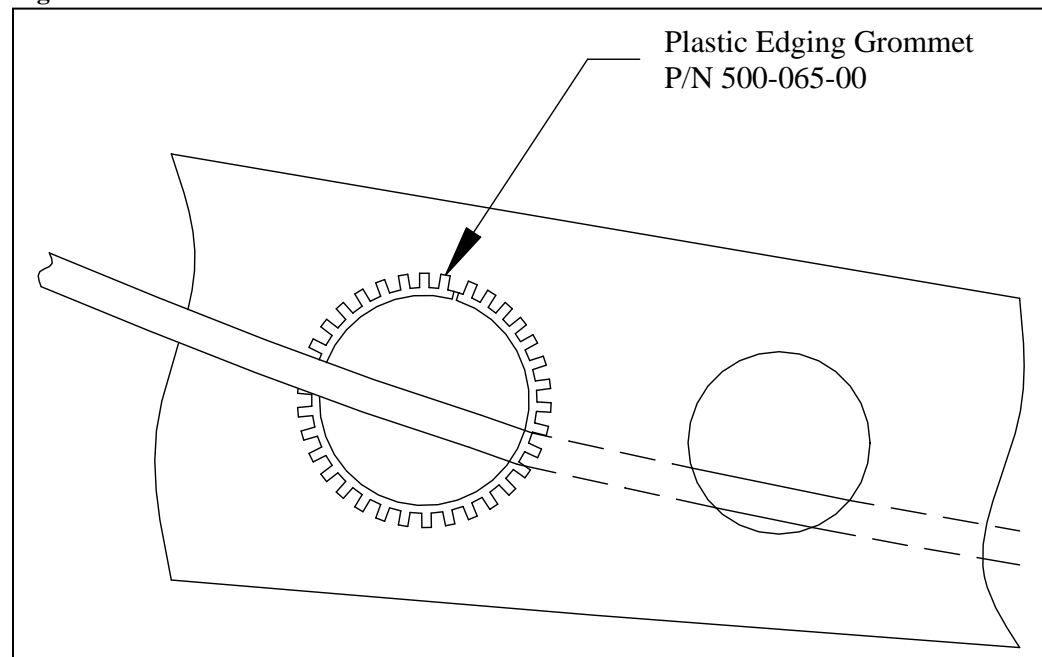


2.2 Fixed Manual Release Cable Assembly Installation continued

- At the RH forward hard point (X2700) secure the cable to the Adel Clamp installed per Figure 2.1.2.
- Install Quick Disconnect Bracket Assembly (P/N 232-151-00) on the RH rear lower fairing (with the fairing removed) at a location 400mm (15.7 in.) to the right of the A/C centerline and in line with the fwd fuel tank support (reference Figure 2.2.1) utilizing the existing insert holes in the honeycomb panel structure. Secure with fasteners (provided pre-assembled on bracket) as illustrated below.

NOTICE

If your helicopter does not have holes in the honeycomb panel, modify panel per Airbus Helicopters Service Bulletin No. 25.00.62.

Figure 2.2.6 QD Bracket Installation

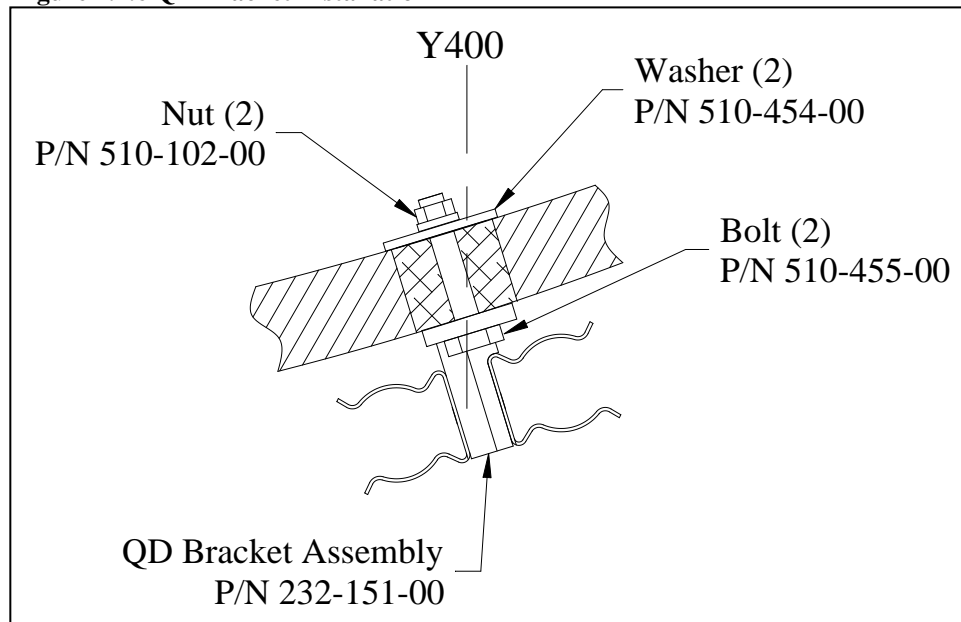


2.2 Fixed Manual Release Cable Assembly Installation continued

- Install the two clamps (Airbus Helicopters P/N A3125-2 H179) in the RH rear lower fairing that will support the removable section of the manual release cable. The clamps are installed at points 1 and 2 (see below) using existing inserts in the belly of the helicopter. Do not install a clamp at the furthest aft insert.

NOTICE

If your helicopter does not have holes in the honeycomb panel, modify it per Airbus Helicopters Service Bulletin No. 25.00.04.

Figure 2.2.7 Cable Support Clamp Installation

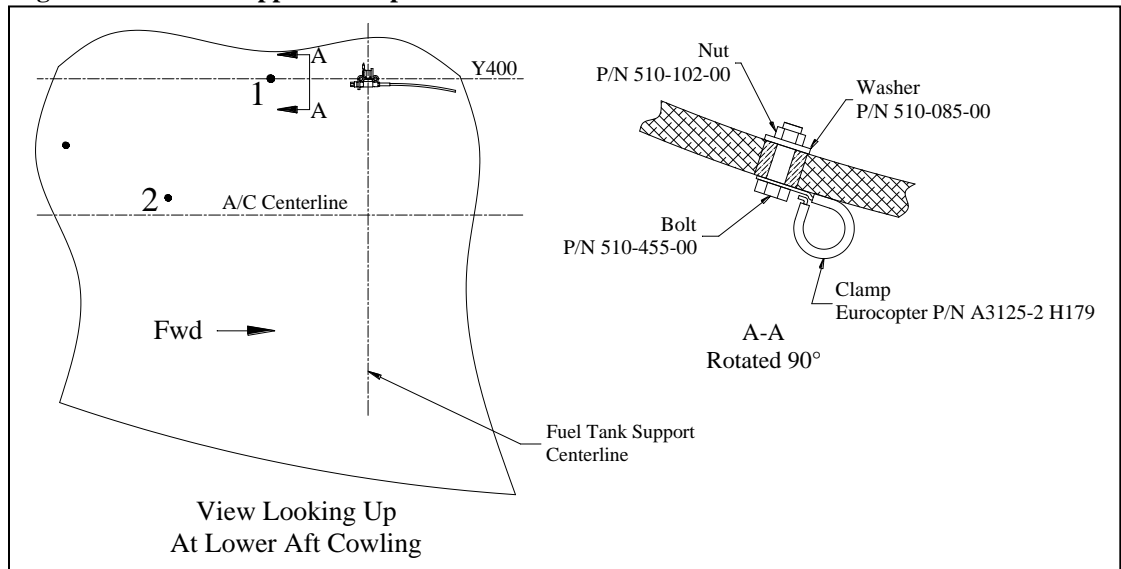


2.3 Cockpit Indicator Installation

The Indicator is mounted on the RH door pillar. If nut clips are not pre-installed in the door pillar, install them per the following.


- Hold the Indicator Bracket (P/N 290-772-00) at a location as shown below and transfer its hole pattern to the door pillar.

Figure 2.3.1 Indicator Bracket Installation

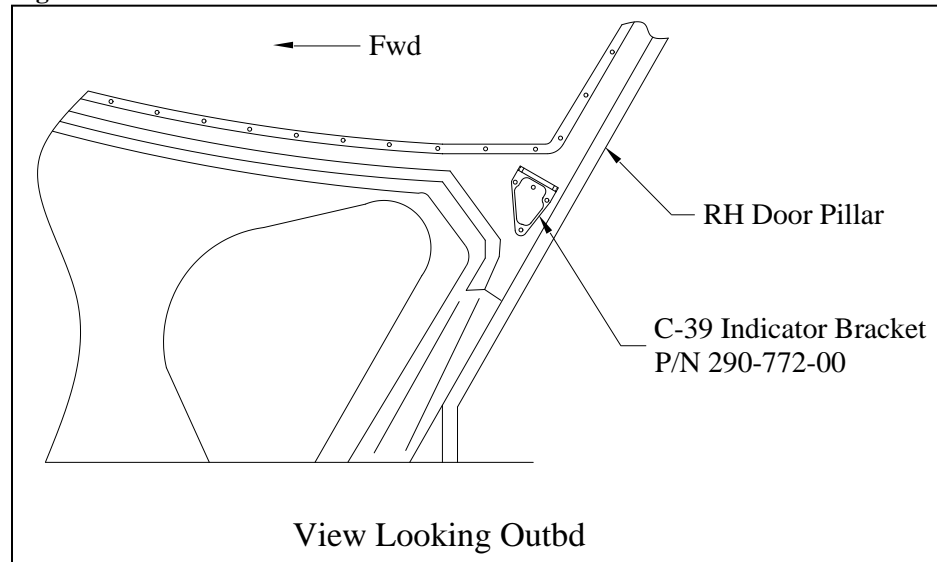

- Drill three mounting holes in the RH door pillar to install the nut clips. Reuse the electrical bonding screw at the fourth location (see below).
- After completing electrical bonding, install the three nut clips (Airbus Helicopters P/N SL211M5-1) and fasten Indicator Bracket with three screws (P/N 510-475-00) and three washers (P/N 510-095-00).


Figure 2.3.2 Indicator Bracket Hardware

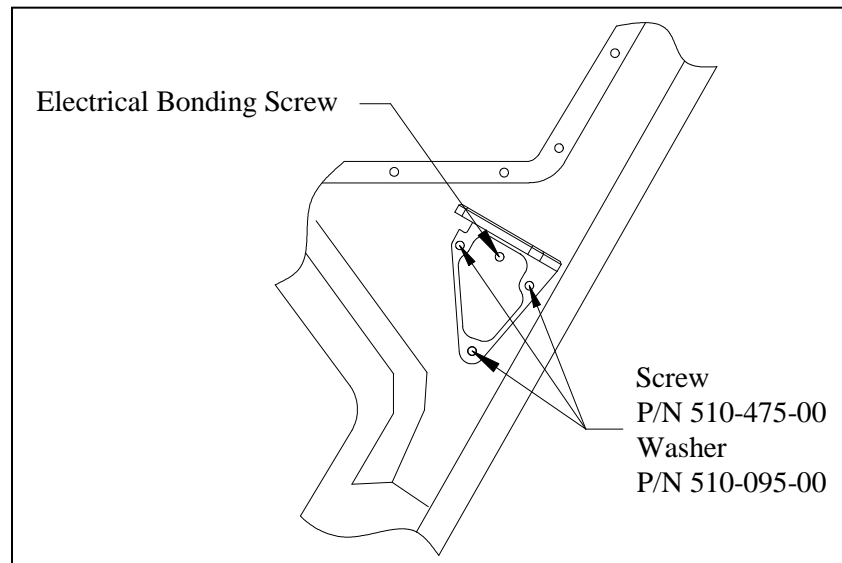

2.3 Cockpit Indicator Installation *continued*

- Install C-39 Indicator (P/N 210-095-00 or P/N 210-095-04) onto bracket with hardware as illustrated below.

Figure 2.3.3 C-39 Indicator Installation

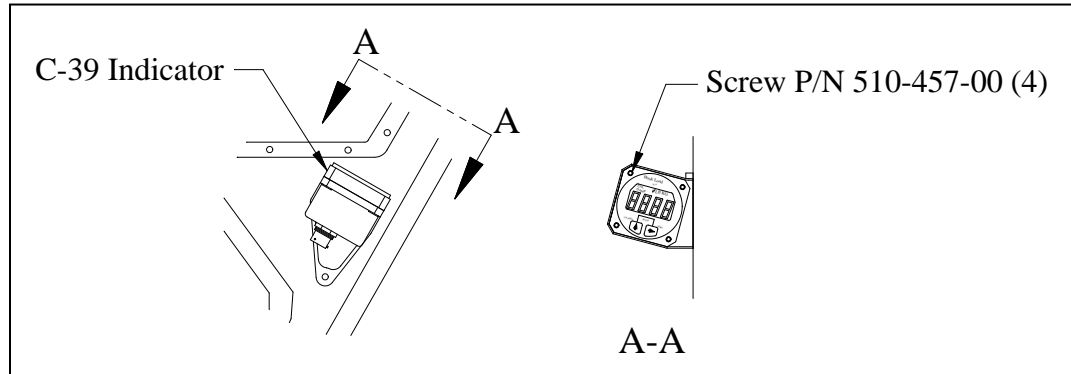

2.4 Electrical Wiring Installation

Install electrical harnesses (P/N 270-106-02 and P/N 270-108-00). Route them along the existing harnesses (reference Figure 2.4.1) while observing the following precautions:

- Pick up existing wire runs by opening existing cable clamps. Nylon ties alone may not be used for primary support.
- The distance between supports should not exceed 21 inches.
- Bend radius of wire or harness must not be less than 10 times the wire or harness diameter.
- Inspect and verify that the wire harness may not be manually deflected into a structure with a bend radius of less than .13”.

Make the appropriate connections with terminal lugs. Secure the C-39 indicator harness (P/N 270-106-02) along the canopy with clamps and connect to the C-39 indicator. Refer to Figure 2.4.7 for electrical schematic.

The P/N 270-106-02 electrical harness includes a data line for use with an Onboard Systems Data Recorder or Analog Meter. These items are not included under this STC. Attach connectors to data line per pin out in Table 2.4.1 to connect the Analog Slave Meter or Data Recorder to the electrical harness “DATA” line. If a data connector is present on the data line use harness P/N 270-059-00 to connect to Analog Slave Meter. If the accessory connector is not used, stow this line of the harness.



The data line may or may not be terminated with a connector depending on manufacture date.

Table 2.4.1 Optional Equipment Connectors


Analog Meter Connector P/N 410-130-00 Mfg P/N: MS3126F10-6P		
Pin	Color	Function
A	WH	Power
B	WH/GN	Clock
C	WH/OR	Data
D	WH/BL	Ground
E	Shield	Shield

Data Recorder Connector P/N 410-011-00, 410-057-00 & 410-020-00		
Pin	Color	Function
1	WH/BL	Ground
3	WH	Power
5	Shield	Shield
7	WH/GN	Clock Signal
9	WH/OR	Data Signal
4	Red*	Flight Switch
2	Purple*	Cap. Switch

*Optional

2.4 Electrical Wiring Installation continued


Figure 2.4.1 Electrical Wiring Routing Overview

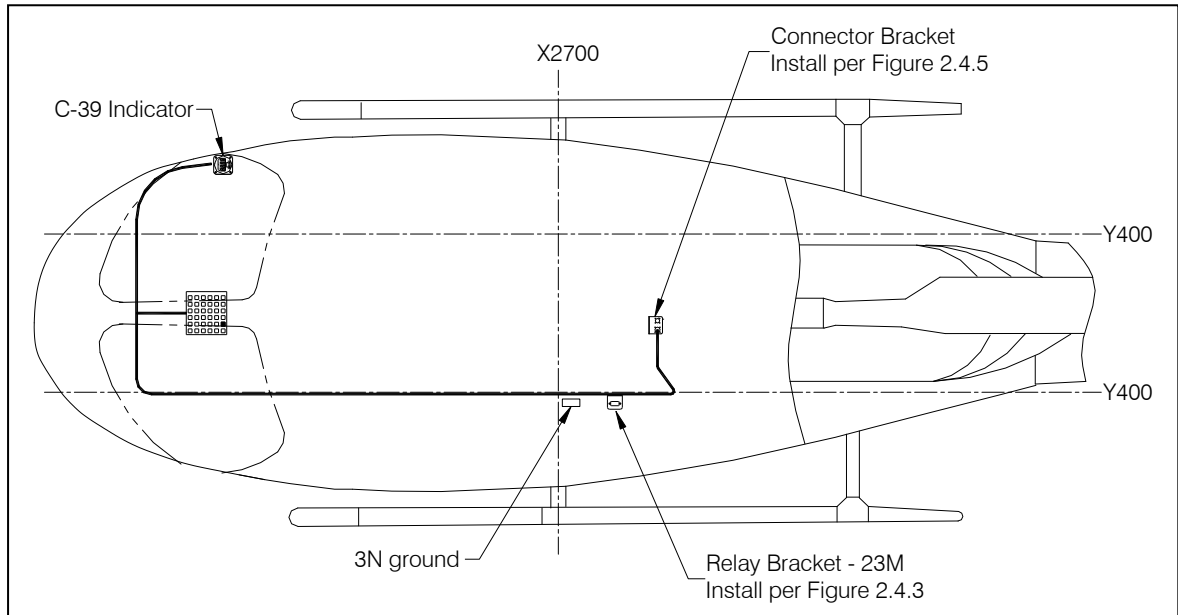

2.4 Electrical Wiring Installation continued


If installing the wire harnesses on a newer AS350B2 or B3 model equipped with a switch panel of circuit breaker design (Airbus Helicopters mod. #07-3274 incorporated) the electrical harness P/N 270-108-00 requires a minor modification. Cut the ME1E wire off just prior to the butt splice and discard the splice and the 20 ga. wires.

Figure 2.4.2 P/N 270-108-00 Harness Modification

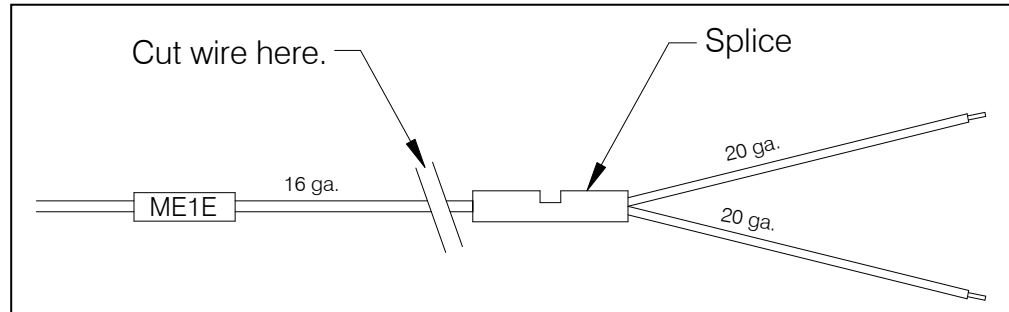

- ❑ In preparation for installing the Relay Bracket (P/N 290-783-00) create two holes in the LH beam at Y400 as illustrated in Figure 2.4.3.


Figure 2.4.3 Relay Bracket Installation

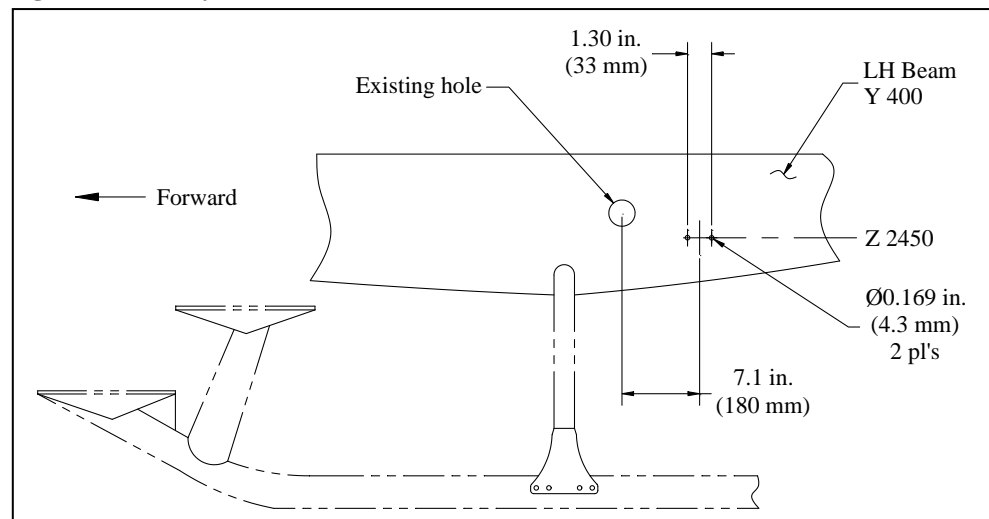

- ❑ Secure Relay Bracket with two screws (P/N 510-277-00), two washers (P/N 510-278-00), and two nuts (P/N 510-279-00).
- ❑ Place relay socket (part of 270-108-00 electrical harness) into relay bracket mounting holes from below and secure to relay and relay bracket with hardware provided with relay (as illustrated below).

2.4 Electrical Wiring Installation continued

Figure 2.4.4 Relay Installation

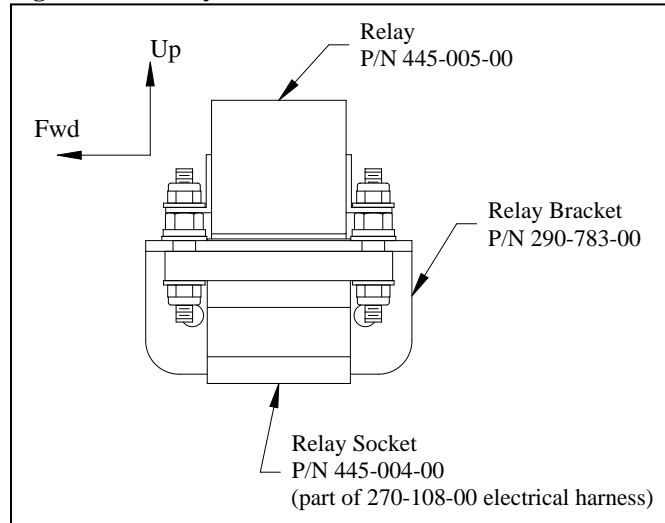


- ❑ Install Connector Bracket (P/N 290-782-00) at fuel tank support frame as illustrated below.
- ❑ Fasten hook release connector (32M) and load cell connector (55M) to the Connector Bracket with screws (P/N 510-481-00), washers (P/N 510-062-00), and nuts (P/N 510-029-00).

NOTICE

Install screws with their heads on the bottom side of bracket flange (if nuts are installed on bottom side they will interfere with mating connector).

Figure 2.4.5 Connector Bracket Installation

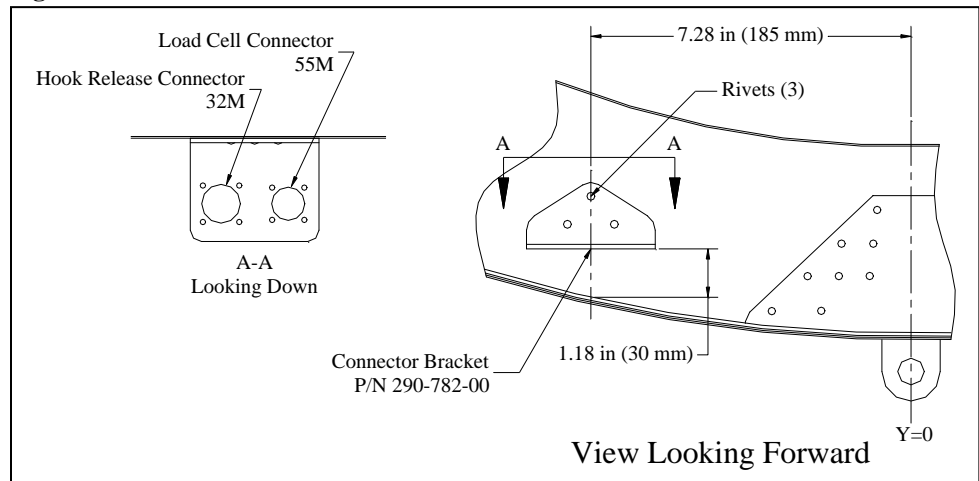


Install electrical markers (P/N 215-165-00).

2.4 Electrical Wiring Installation *continued*

Install the Ground Strap (P/N 270-125-00) terminal at the 3N ground connector bracket at the LH airframe beam at Y400 per the following:

- ❑ Remove upper mounting hardware (see below) for 3N connector bracket and retain.
- ❑ Prepare the surface for electrical bonding per Airbus Helicopters electrical bonding procedure. Refer to section 20.02.07 of the Airbus Helicopters Standard Practices Manual.
- ❑ Install ground strap terminal, re-using hardware removed per above step.

Figure 2.4.6 Ground Strap Installation Location

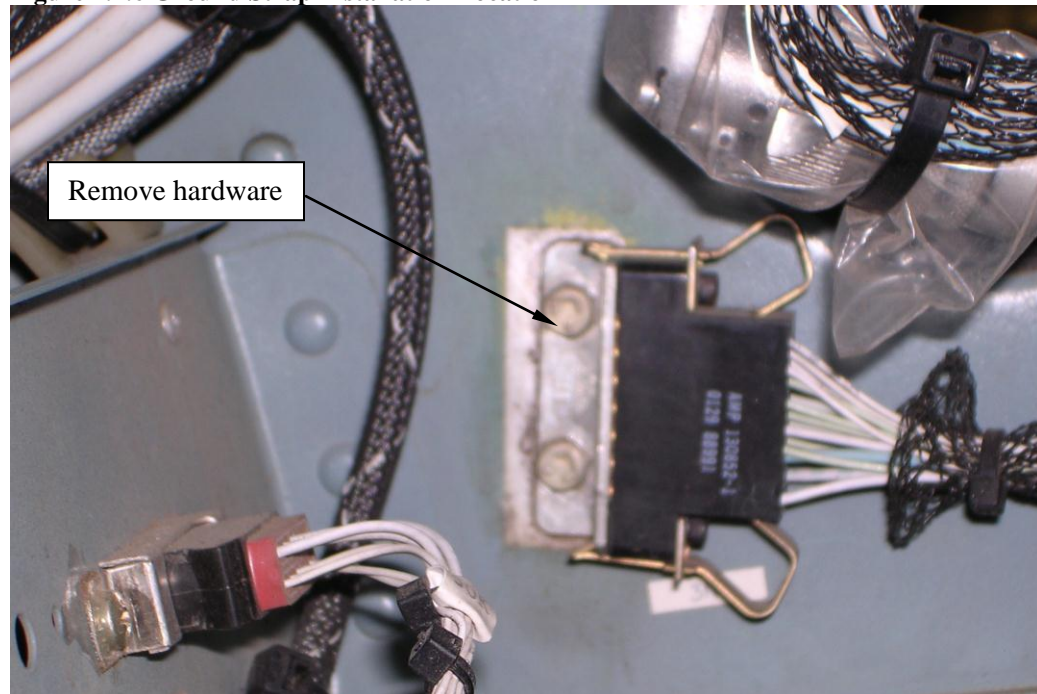

- ❑ Route the Ground Strap to the load weigh and electrical release harnesses installed previously and route with these harnesses, while securing with ty-wraps, to their termination points at the Connector Bracket.
- ❑ Route the Ground Strap around the Connector Bracket and position it such that the disconnect fitting at the end can be routed through the connector access hole and extended below the lower fairing (when installed).


2.4 Electrical Wiring Installation continued

The electrical schematic for the electrical release system and the load weigh system is shown below along with the aircraft's interface points. Eurocopter modification #'s 07-4280 and 07-3450 are reflected below. Earlier Eurocopter configurations which affected how and where wire numbers ME1E, ME2E and ME10E of the electrical release harness and load weigh harness interface with the helicopter are shown on the following page. Refer to the applicable Eurocopter Wiring Diagrams Manual for additional information and for other cargo hook aircraft side wiring configurations that may not be shown.

For the C-39 Indicator backlighting, install wire 2LK71E to an available pin in the instrument panel or console lighting circuit (31L for pre-mod 07-4280), at 28 volts the indicator's internal bulb draws 25 mA.


If existing Eurocopter cargo hook or load weigh wiring is installed and terminated at the locations below, remove the wires completely or remove from connectors and cap and stow them.

Figure 2.4.7 Electrical Schematic

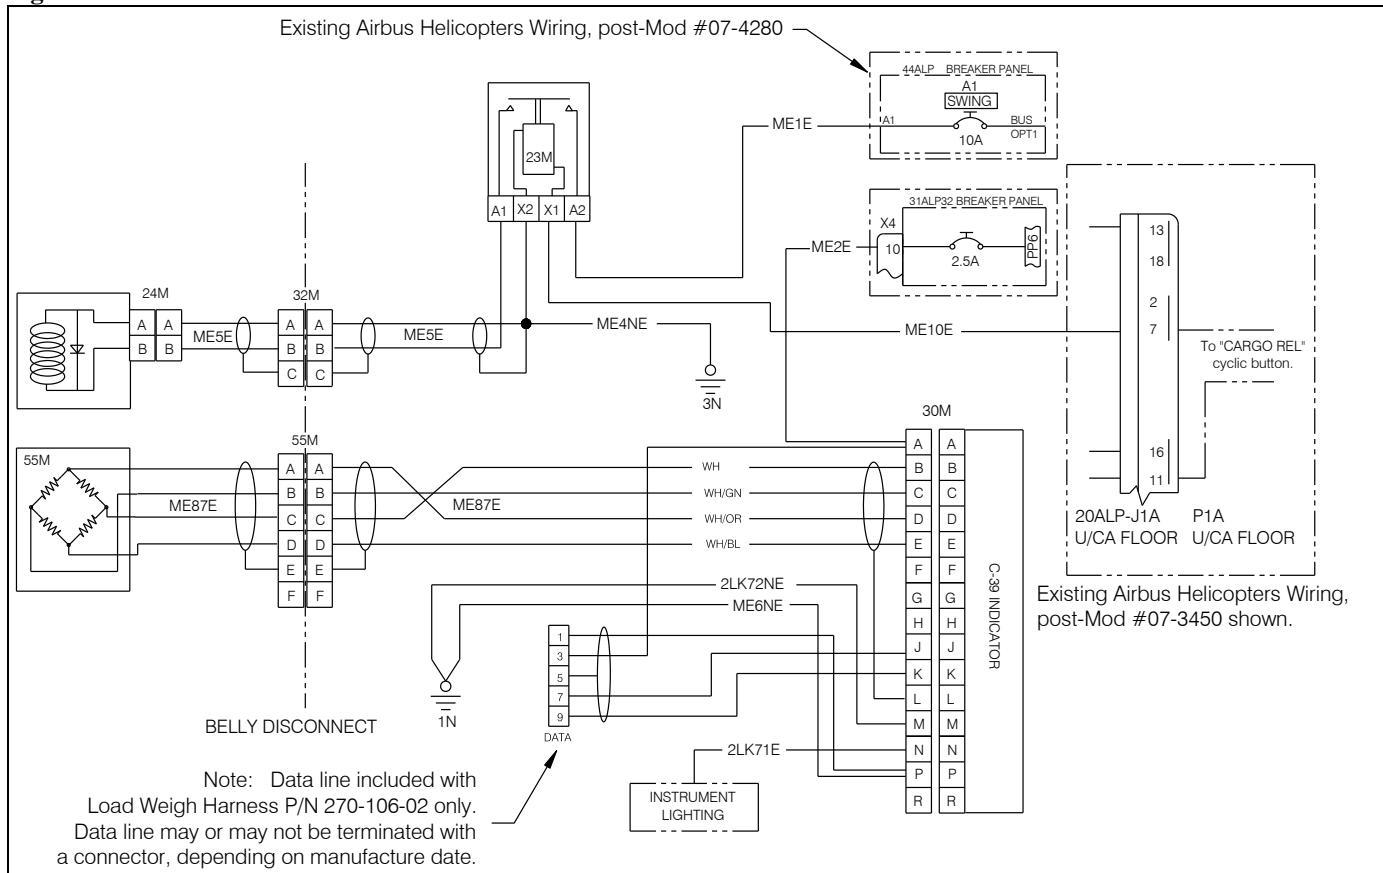

2.4 Electrical Wiring Installation *continued*

Figure 2.4.7 Electrical Schematic, *continued*

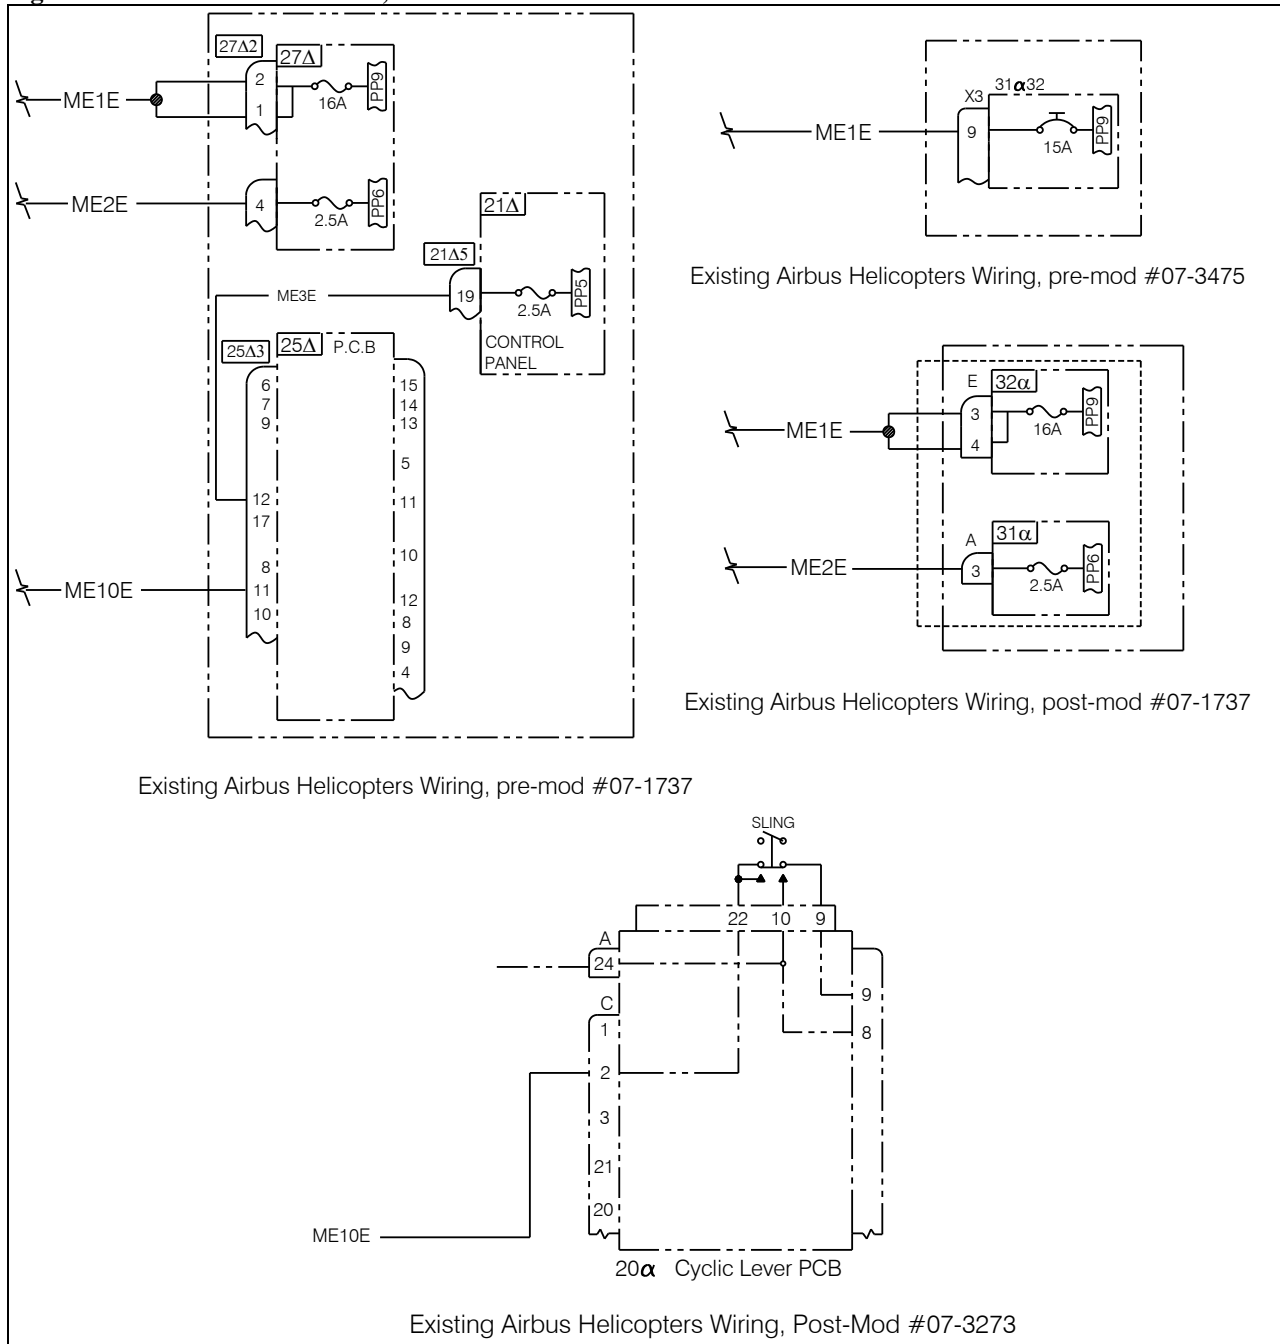

2.5 Fuel Drain Guard Installation

NOTICE

If installing the kit on a helicopter that has NOT been retrofitted with the B-2 style dual fuel pump type tank (Airbus Helicopters P/N 350A55-1015-0251), the fuel drain guard installation is omitted. Skip to section 2.6.

In preparation for installing the fuel drain guard:

- ❑ Obtain ProSeal sealant (P/N PR1422-B).
- ❑ Verify that the fuel drain lever has been modified per AD 2005-03-08 requirements.
- ❑ Completely drain the fuel from the fuel tank.
- ❑ Begin disassembly of the fuel drain assembly by disconnecting the fuel drain control cable from the Lever (Airbus Helicopters P/N 350A55-1043-21). To free the control cable, remove the Sleeve (Airbus Helicopters P/N N1-5ALU) and Cable Grip (Airbus Helicopters P/N 58-2-009). See Figure 2.5.1.


Figure 2.5.1 Removing Control Cable



2.5 Fuel Drain Guard Installation continued


- ❑ Remove and retain spring (Airbus Helicopters P/N 350A55-1044-21) and Lever.
- ❑ Remove the cable support bracket. Retain the two attachment screws.
- ❑ Remove the connections from the common ground point on the lever retainer.
- ❑ Remove the safety wire securing the Fuel Drain Valve (Airbus Helicopters P/N). Remove the Fuel Drain Valve and the Retainer from the tank. Discard used Fuel Valve Seal (Airbus Helicopters P/N SD16X-21P).
- ❑ Remove the residual sealant from the tank, taking care to not mar the sealing surface. Prepare the area for sealing per Airbus Helicopters Standard Practices Manual.

Figure 2.5.2 Fuel Drain Disassembly Complete

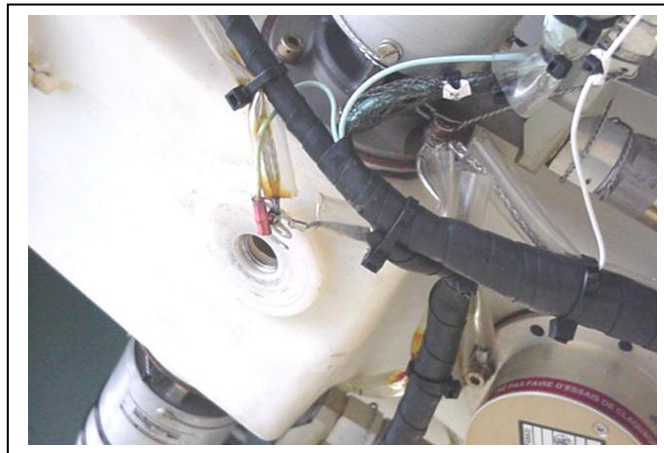

- ❑ Prepare the Retainer (P/N 290-888-00) for electrical bonding by removing the anodize from the area shown in Figure 2.5.3.

Figure 2.5.3 Prepare Retainer

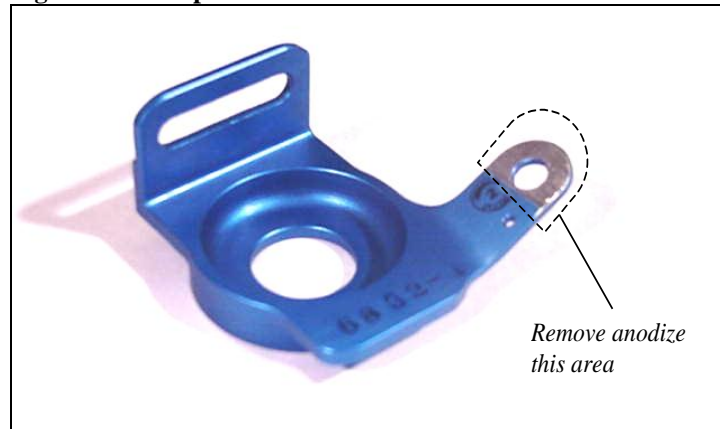

2.5 Fuel Drain Guard Installation *continued*

- Prepare PR1422-B or equivalent fuel tank sealant per Airbus Helicopters Standard Practices Manual. Apply sealant to Retainer as shown in Figure 2.5.4. Retain unused sealant to ensure proper cure.

Figure 2.5.4 Apply Sealant

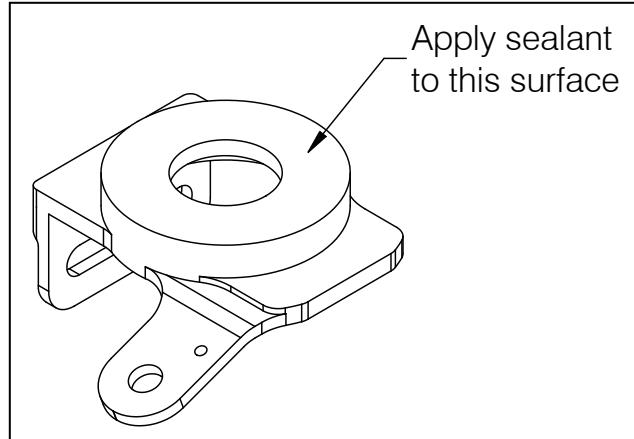


Figure 2.5.5 Position Guard



NOTICE

On some aircraft, the guard may have to be modified to fit the key on the fuel tank. In these cases, the sides of the clearance slot on the guard should be widened the minimum amount necessary in order to fit over the key. See figures 2.5.6 and 2.5.7.

2.5 Fuel Drain Guard Installation continued

Figure 2.5.6 Fuel Tank Key


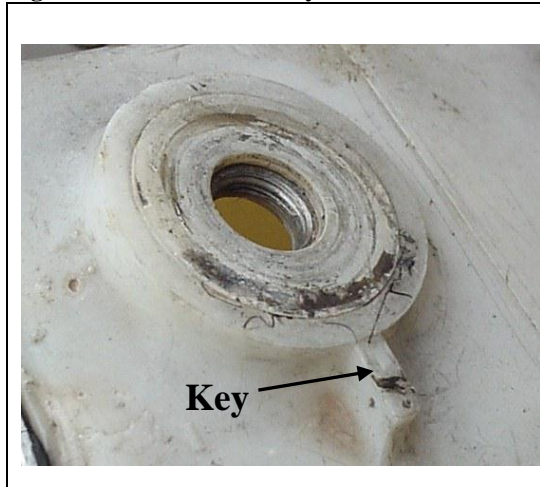


Figure 2.5.7 Modification of Guard Slot



- ❑ Carefully place the Retainer inside the Guard by inserting the tab through the slot in the Guard. Press the retainer to the tank firmly and center it about the drain hole. See Figure 2.5.8.

Figure 2.5.8 Retainer/Guard Assembly

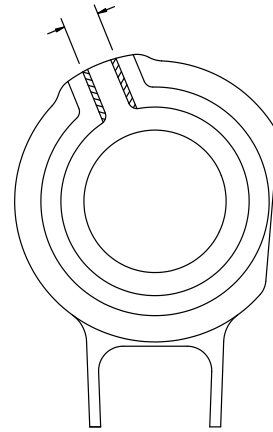

- ❑ Secure the Guard and Retainer by re-installing the Fuel Drain Valve with Fuel Valve Seal, P/N 610-024-00 (Airbus Helicopters P/N SD16X-21P). Use a flat-blade screwdriver to prevent the Retainer from twisting when tightening the Fuel Drain Valve. Torque per Airbus Helicopters specifications.


NOTICE

The guard is not intended to fit tightly with the fuel tank. When properly installed, the guard should have freedom to move slightly.

2.5 Fuel Drain Guard Installation continued

- ❑ Secure the Fuel Drain Valve with safety wire using the small hole in the retainer tab.
- ❑ Re-install the electrical connections to the new Retainer tab per Airbus Helicopters Electrical Bonding Procedure. Refer to Airbus Helicopters Standard Practices Manual, 20.02.07.
- ❑ Install the Lever by placing it in Retainer slot and rotating upwards. Secure with cotter pin (P/N 510-526-00). See Figure 2.5.9.

Figure 2.5.9 Install Lever

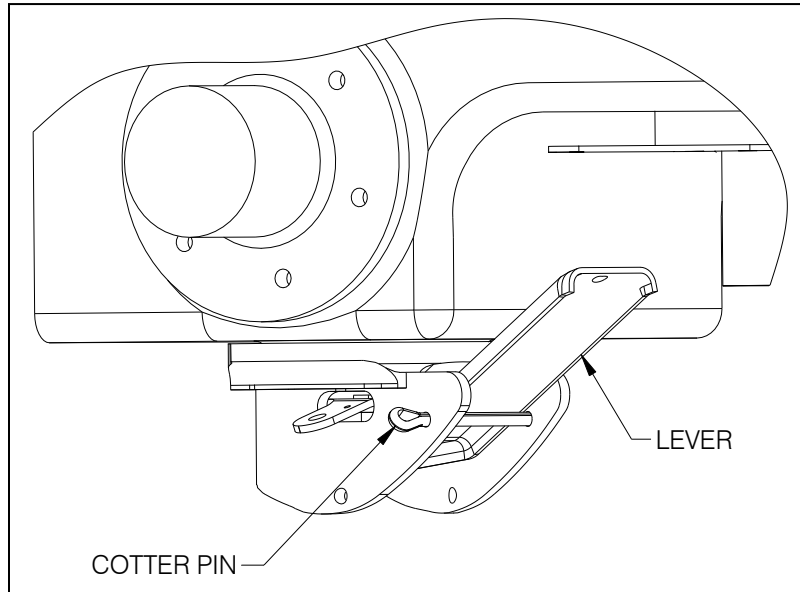

- ❑ Install a second cotter pin through the other holes in the Guard (this cotter pin is for valve protection only and is not used for rigging purposes).
- ❑ Prepare to install Bracket (P/N 290-893-00) by threading the control cable through the Bracket hole. Install Bracket using the two screws removed previously.
- ❑ Pass the cable through the spring and then the Lever. Install the Sleeve and Cable Grip.




To avoid inadvertent fuel loss, Airbus Helicopters P/N 58-2-009 Cable Grip must be used with this installation.

- ❑ Adjust the cable travel by doing the following: allow the lever to rest against the cotter pin stop. Slide the Cable Grip up to the bottom of the lever and secure. See Figure 2.5.10.

2.5 Fuel Drain Guard Installation continued

Figure 2.5.10 Adjust Cable Travel

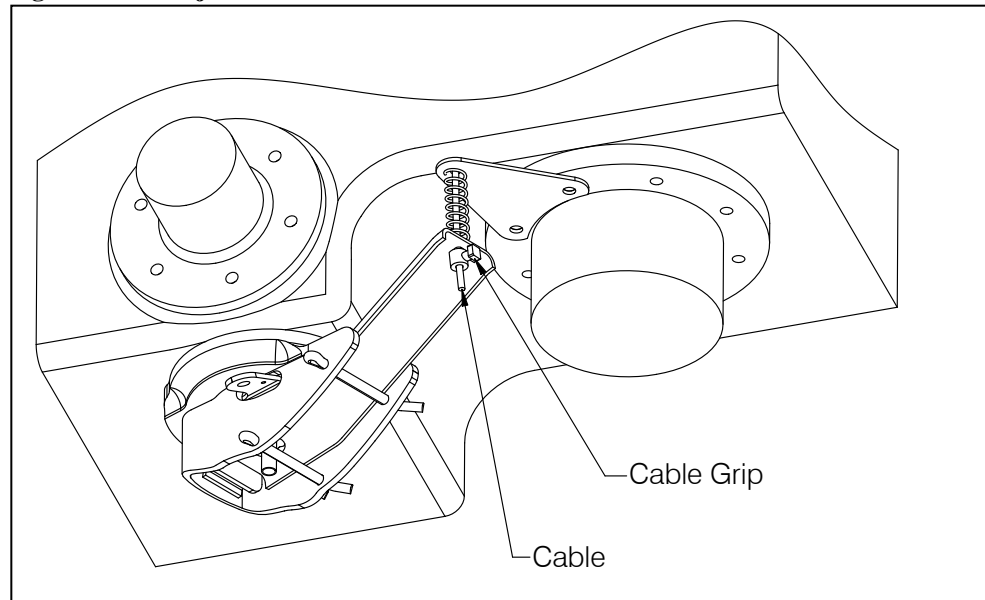

- ❑ Check the cable adjustment with the release handle on the side of the aircraft. There should be a minimum of .25 inch (6mm) cable travel before valve opens. Adjust the Cable Grip as required.
- ❑ Trim excess cable to within .25" of cable grip.
- ❑ Allow the sealant to cure per Airbus Helicopters Standard Practices Manual before adding fuel. Verify proper cure of unused sealant.
- ❑ Add fuel to the tank and check for leakage.
- ❑ Reinstall aft lower cowling. Check for clearance between Guard and cowling. If required trim cowling cutout to provide a min of .125 inch (3.5mm) clearance between the cowling and guard. See Figure 2.5.11 for completed installation.

Figure 2.5.11 Installation Complete




2.6 Swing Suspension Installation

- ❑ Install the cable assemblies onto the swing suspension frame with hardware provided pre-assembled onto the cable clevis end. Fasten the two shorter cable assemblies (P/N 232-140-01) onto the forward pivot points of the suspension frame and the two longer cable assemblies (P/N 232-141-01) to the aft pivot points.

The forward end of the suspension is determined by the orientation of the cargo hook. **When the suspension is installed the cargo hook load beam must point to the left side of the helicopter** (the manual release cable is routed to the right side of the helicopter).

- ❑ Install the Swing Suspension onto the aircraft by attaching the four clevises at the end of the cables to the **INBOARD** holes on the Shackle Assemblies with the Quick Release Pins (P/N 290-851-00) as shown in Figure 2.6.1. Install the attached safety pins at each Quick Release Pin.

Figure 2.6.1 Cargo Hook Swing Suspension Assembly Installation

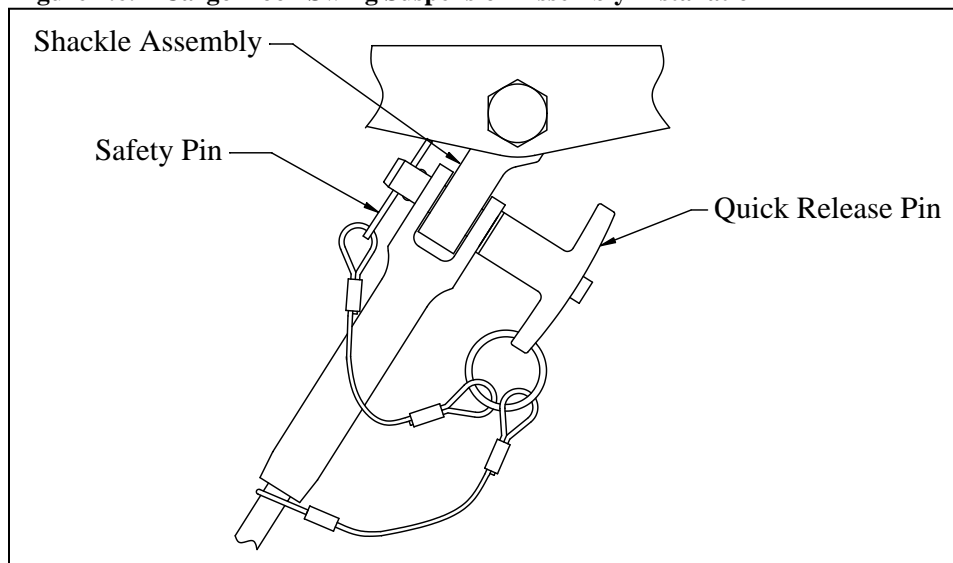


2.7 Removable Manual Release Cable Assembly Installation

Connect the removable manual release cable (P/N 268-024-02) to the cargo hook first, per the following instructions:


- ❑ Remove the manual release cover from the cargo hook.
- ❑ Thread the fitting at the end of the manual release cable into the manual release boss on the hook side plate until the threads protrude approximately .125" inch beyond the boss and secure with jam nut (as shown in Figure 2.7.1). Leave the cover off of the cargo hook until the other end of the release cable is connected, in order to verify proper setting.

Figure 2.7.1 Manual Release Cable Fitting Adjustment

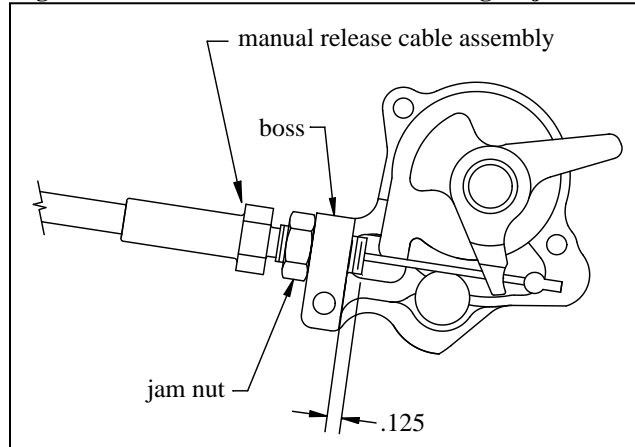

- ❑ Route the cable from the hook through the aft end of the suspension frame as illustrated below. Clip the cable into the clamps at points 1 and 2 (installed per section 2.2).

Figure 2.7.2 Release Cable Routing

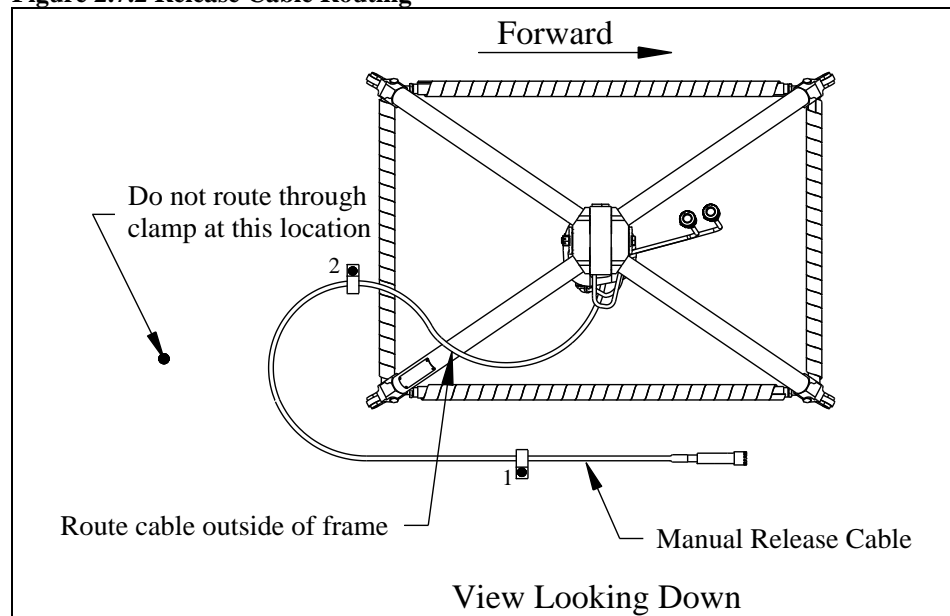

2.7 Removable Manual Release Cable Assembly Installation *continued*


- ❑ Connect the other end of the removable cable assembly to the end of the fixed cable by sliding the Adapter Fitting back to expose the swaged cable end fitting and connecting this fitting to the swaged cable end fitting on the fixed cable as shown below.

NOTICE

The pre-set compressed spring length is set at the factory to be 1.94/2.00 inches (see below). If necessary, minor adjustments can be made at the release handle assembly on the collective.

- ❑ Thread the Adapter Fitting on the removable cable onto the fixed cable adapter fitting and lock in position by engaging a castellation with the Locking Pin (P/N 514-052-00).
- ❑ Snap the removable cable Adapter Fitting into the inboard spring clip on the Quick Disconnect Support Assembly.

Figure 2.7.3 Manual Release Cable Connection

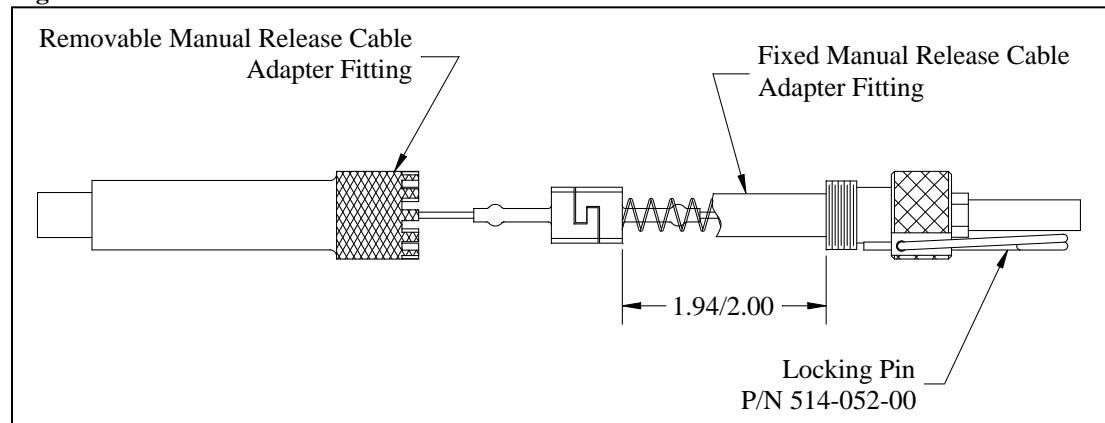

2.7 Removable Manual Release Cable Assembly Installation Continued

□ Verify proper setting at the hook:


- Place the cable ball end fitting into the hook manual release fork fitting as illustrated in Figure 2.7.4.



Manual release cable rigging must be done with the cargo hook in the closed and locked position.

- With the cargo hook closed and locked, rotate the release lever in the clockwise direction to remove free play (this is felt as the lever rotates relatively easily for several degrees as the free play is taken up) and measure the gap between the cable ball end and the release lever fork with the manual release lever in the cockpit in the non-release position. This gap should be a minimum of .125 inches (3.2 mm) as shown in Figure 2.7.4.
- If the gap does not measure at least .125", make adjustments at the cargo hook or at the release lever assembly in the cockpit. Adjustments at the hook are done by disconnecting the cable at the interface with the fixed manual release cable (Figure 2.7.3), loosening the jam nut, and rotating the cable in the required direction.

Figure 2.7.4 Manual Release Cable Rigging

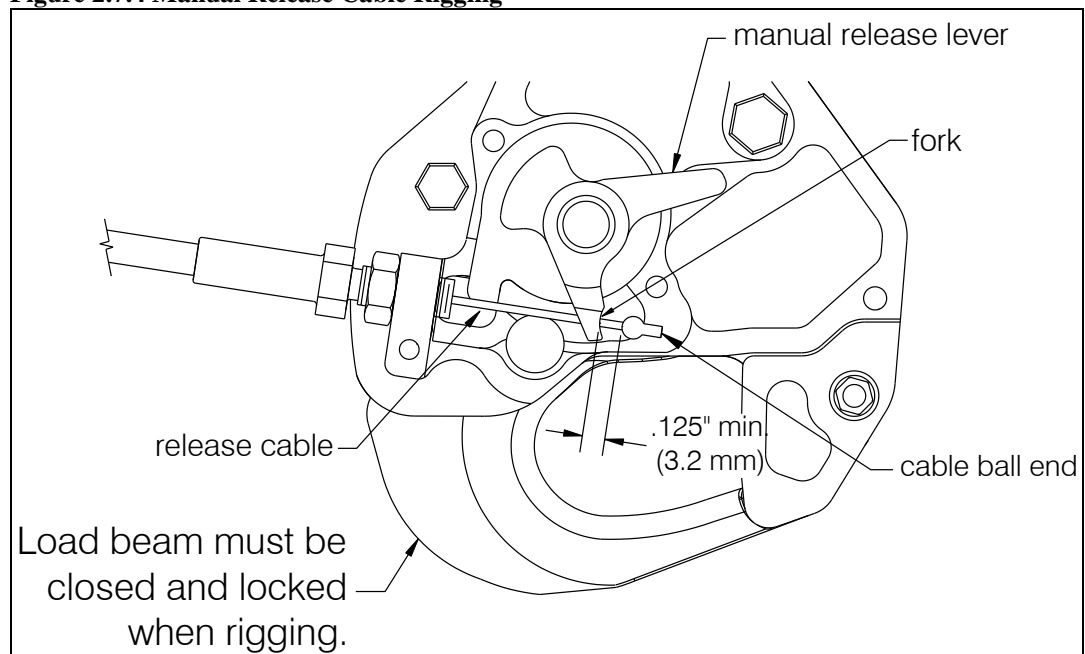

- Move hook and swing frame throughout its range of motion while observing free play. At no point should the free play be less than .030".
- Also, check that the cable housing is not kinked or pulled tight in any hook and swing frame position.

2.8 External Electrical Release and Load Cell Cable Installation

- ❑ Connect the end of the cargo hook electrical release cable to the fixed electrical release connector (32M) installed per Section 2.4.
- ❑ Connect the Ground Strap from the hook to the fixed ground strap installed per section 2.4.
- ❑ Connect the end of the load cell cable to the fixed load weigh harness connector (55M) installed per Section 2.4.

See table 2-2 for connector pin out information

Table 2.2 Cargo Hook Connector

<i>Pin</i>	<i>Function</i>
A	Ground
B	Power




The cargo hook is equipped with a suppression diode that will be damaged if the cargo hook electrical connection is reversed.



Un-commanded cargo hook release will happen if the manual release cable is improperly restrained. The cable must not be the stops that prevent the Cargo Hook from swinging freely in all directions. If the Cargo Hook loads cause the hook to strain against the manual release cable the swaged end of the cable may separate allowing the inner cable to activate the cargo hook manual release mechanism. The result is an un-commanded release. Ensure that no combination of cyclic stick or Cargo Hook position is restrained by the manual release cable.

2.8 External Electrical Release and Load Cell Cable Installation Continued

Figure 2.8.1 Un-commanded Release From Incorrectly Secured Cable

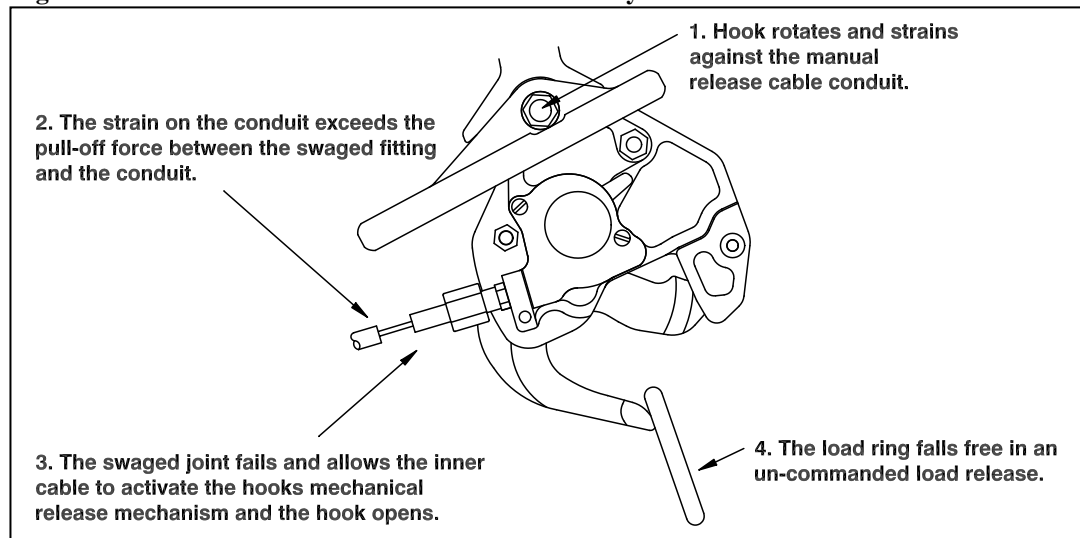

2.9 Placard Installation

- Install appropriate load limitation placard, P/N 215-166-00 (3086 lb max. hook load) or P/N 215-168-00 (2557 lb max. hook load), dependent on the model of AS350 on which the system is being installed. Consult the Airbus Helicopters Flight Manual Supplement applicable to your particular helicopter for the external load limitation. Locate the placard on the belly of the helicopter, visible to the ground operator and near the hook.



The provided load limitation placards P/N 215-166-00 and P/N 215-168-00 feature black letters on a transparent background. If being installed on a dark-colored helicopter the lettering may not be readily visible. In this instance new placards of the same size and with the same text may be fabricated with a different background to provide visibility. The lettering must contrast with the background.



If installation is being done under a Brazilian CHST, bilingual placards are required. The required placards are illustrated in Section 7, fabricate as shown or contact Onboard Systems for price and availability. Install appropriate load limitation placard, P/N 215-200-00 (1400 kg max. hook load) or P/N 215-201-00 (1160 kg max. hook load), dependent on the model of AS350 on which the system is being installed. Install “SOLTA-CARGA” placard (P/N 215-202-00) on the manual release lever in the cockpit over, or next to, the “CARGO RELEASE” engraving.

Installation Check-Out

After installation of the Cargo Hook Swing Suspension System, perform the following functional checks.

1. Swing the installed Cargo Hook on the suspension to its full extremes to ensure that the manual release cable assembly and the electrical release cable have enough slack to allow full swing of the cargo hook assembly without straining or damaging the cables. The cables must not be the stops that prevent the Cargo Hook from swinging freely in all directions.
2. Swing the suspension to its full extremes to ensure that the manual release cable assembly and the electrical release cable have enough slack to allow full swing of the suspension without straining or damaging the cables. The cables must not be the stops that prevent the suspension from swinging freely in all directions.
3. With no load on the cargo hook load beam, pull the handle operated cargo hook mechanical release, the Cargo Hook should release. Reset the cargo hook load beam.
4. With no load on the cargo hook load beam, depress the cargo hook electrical release button, the Cargo Hook should release. Reset the cargo hook load beam.
5. Perform an EMI ground test per AC 43.13-1b section 11-107. For equipment that can only be checked in flight an EMI flight test may be required.



The cargo hook is of a class of equipment not known to have a high potential for interference. This class of equipment does not require special EMI installation testing (i.e. FADEC) as required in paragraphs 7 and 8 of FAA policy memorandum ASW-2001-02.

6. Power on the Indicator and allow it to warm up for 5 minutes (with no load on the hook). Press both Indicator buttons at the same time to go to the Setup Mode. Scroll through the menu until the symbol “0 in” is displayed, then press the right button. Remove any weight that is not to be zeroed out and press either button to complete the procedure.
7. If fuel drain guard was installed, pull the handle on the side of the helicopter and verify that fuel is dispensed from the valve.

Component Weights

The weights and cgs of the Cargo Hook Swing Suspension System components are listed below.

Table 2.3 Component Weights

Item	Weight	Station
Removable Provisions	30.0 lbs (13.6 kg)	133 in (3375 mm)
Fixed Provisions	5.5 lbs (2.5 kg)	110 in (2794 mm)
Fuel Drain Guard	0.4 lbs (.18 kg)	135 in. (3430 mm)
Total	35.9 lbs (16.3 kg)	129.4 in (3288 mm)

Paper Work

In the US, fill in FAA form 337 for the initial installation. This procedure may vary in different countries. Make the appropriate aircraft log book entry. Insert the RFMS (document no. 121-012-01) into the Rotorcraft Flight Manual.

Section 3


Load Weigh System Operation Instructions

Indicator Front Panel

The C-39 Indicator front panel includes the following features.

- The four 7 segment LCD digits show the weight on the Cargo Hook and display various setup information.
- The Legends clarify the digital display, i.e. - when the LB Legend is turned on, the display will be pounds, etc.
- The right button is used to Zero the display in the Run Mode and select the digit to be changed in the Setup Mode.
- The left button is used to Un-Zero the display in the Run Mode and scroll the selected digit in the Setup Mode.

Figure 3.1 Front Panel

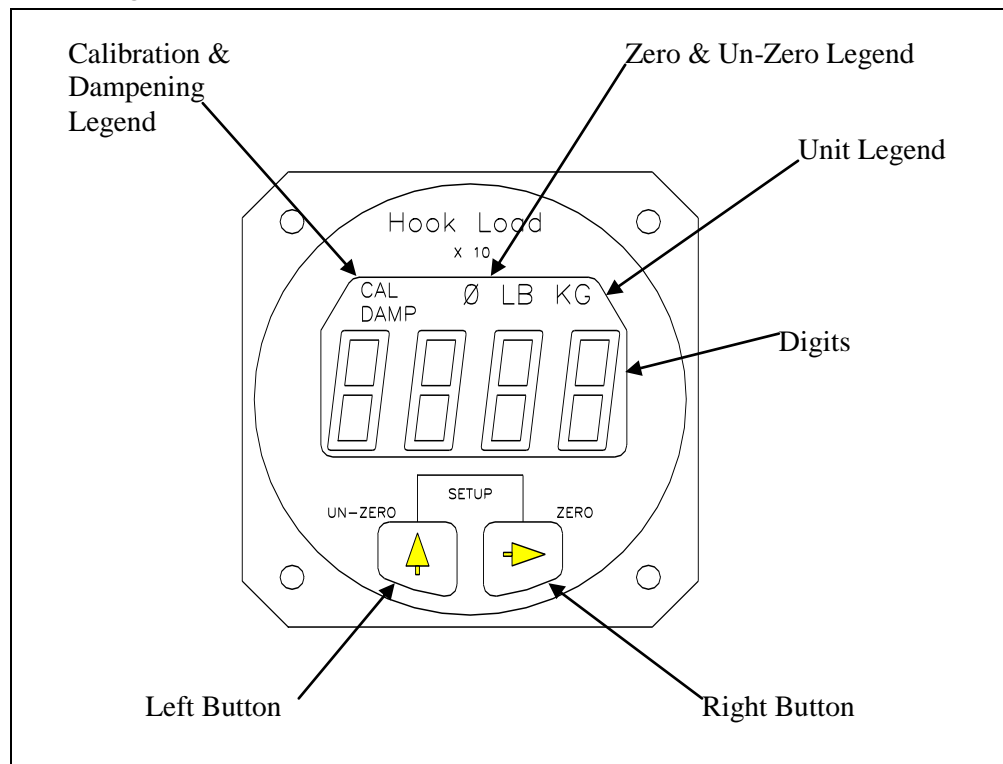


The Run Mode

The C-39 Indicator has two operating modes, Run and Setup. The Run Mode is used to display the cargo hook weight and the Setup Mode is used to setup or configure the Indicator to the helicopter and to the Load Cell. When powered up, the Indicator always comes on in the Run Mode.


After the Indicator has been correctly installed, power it up by activating the aircraft electrical system. The Indicator will go through a self-diagnostic routine. During this routine the display will display all of the digits and legends. If a problem is found during the routine an Error Code will be displayed. For an explanation of Error Codes see the section *Error Codes*. After the diagnostic routine the display should look like this:

Figure 3.2 After Diagnostic Routine

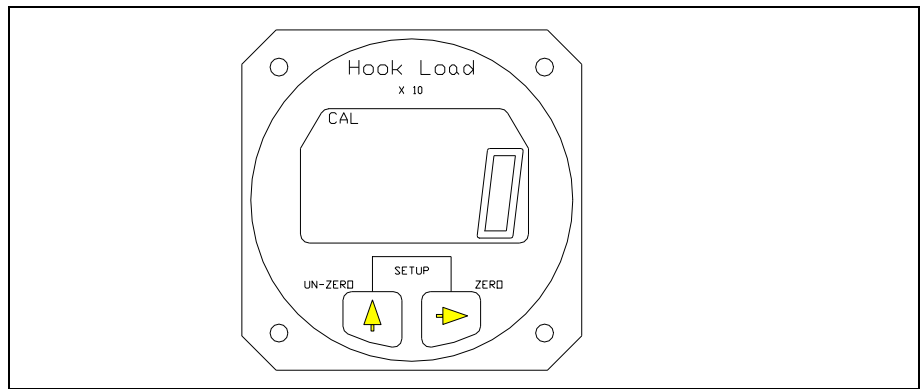

The illustration is of the Indicator in the Run Mode with no load on the hook. Note the LB legend displayed.

Figure 3.3 LB Legend Displayed

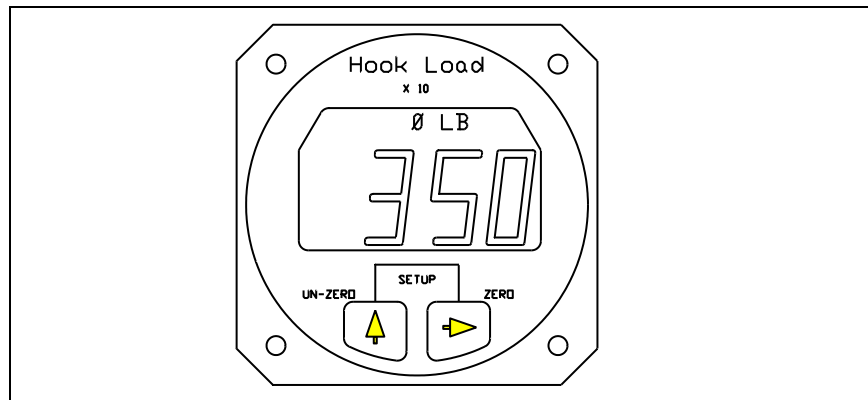


The illustration is a typical hook load reading. The display is 3,500 pounds, note the last digit is not displayed.

The Run Mode continued

To Zero or Tare the Display

The zero feature is used to zero or tare the weight on the Cargo Hook that is not wanted, such as the weight of a cargo net or long line. The Right button is used to zero the Indicator reading. When the Right button is pressed the display is zeroed. The zero legend is turned on and the zeroed number is stored in memory. If the Right button is pressed again, before the Un-zero button is pressed, the display blinks in response to the button closure. Zero is only available in the Run Mode.

Figure 3.4 Zeroing the Display

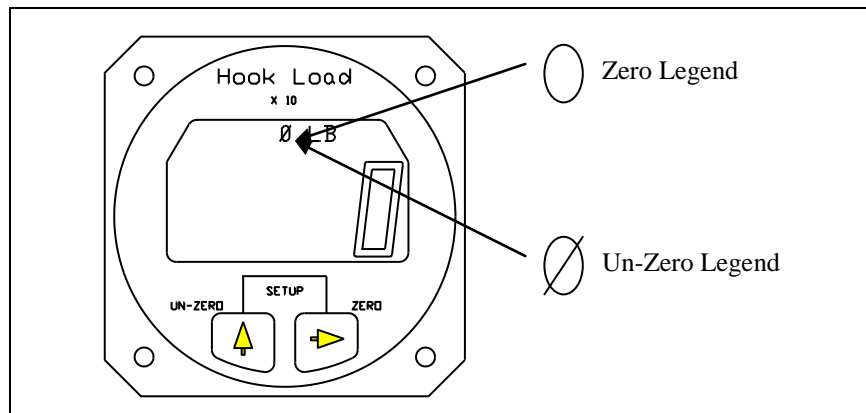

To Un-Zero the Display

The Left button is used to add the zeroed value back into the current Indicator reading or Un-zero the display. When the Left button is pressed, the number previously zeroed is added to the current display and the Un-zero legend is turned on. If the Left button is again pressed before the zero button is pressed, the display blinks in response to the button closure. Un-Zero is only available in the Run Mode.

The Run Mode continued

Error Codes

Error Codes are the result of difficulties discovered during the Indicator diagnostic tests. Diagnostic tests occur at power up and during the execution of certain routines. Listed below is a matrix of the Error Code displays, their meaning and possible corrective action. Pressing either button will usually bypass the error code, however, the displayed information may be suspect.

Table 3.1 Indicator Error Codes

DISPLAY	CAUSE	POSSIBLE CORRECTIVE ACTION
Err 1	A/D or D/A circuit failure	Potential short in the optional analog meter cable. Clear short and power cycle the Indicator by turning the power to the Indicator off for a few moments. If Error Code continues, return the Indicator to the factory.
Err 2	NV Ram failure	Power cycle the Indicator; if Error Code continues, return the Indicator to the factory.
Err 3	NV Ram write failure	Re-enter data, if Error Code continues, return the Indicator to the factory.
Err 4	NV Ram busy failure	Power cycle the Indicator, if Error Code continues return the Indicator to the factory.

The Setup Mode

The C-39 Indicator can be used with a wide range of helicopters and load cells. The Setup Mode on the Indicator matches the Indicator to the Load Cell and to the helicopter. This is done by entering data into the Indicator. Entered data includes the load cell Calibration Code, the units that the Indicator should read-out (pounds or kilograms), and several other items.

The Indicator has a group of Setup routines, arranged in menu form, that are used to configure the Indicator. Shown on the next page is a matrix of the Setup routines and a brief discussion of their function and how they are programmed. A complete discussion of each setup item is presented later in this section.

To enter the Setup Mode press both the Right and Left buttons at the same time while the Indicator is powered up and in the Run Mode. To exit the Setup Mode and return to the Run Mode, press both the buttons at the same time. If you are in a Setup routine and have started to change an entry, but you change your mind before completing the procedure, power cycle the Indicator to exit the Setup Mode and then go to the Run Mode without changing the item. The Indicator is power cycled by turning the Indicator power off for a few moments.

The Setup Mode, continued

Table 3.2 Indicator Setup Routines

MENU	FUNCTION	DISPLAY
Press the Left button to scroll through the menu	Press the Right button to view or change the menu item.	To return to the Run Mode press both the Right and Left buttons at the same time.
DAMP	<u>Dampening Level</u> , sets the pilots preference for display dampening.	Blinking display is previously entered Dampening Level. Select the desired dampening level by pressing the Left button.
CODE	<u>Calibration Code</u> , matches the Indicator to the Load Cell.	Display is previously entered CAL Code. The Code is changed by selecting the digit to be changed with the Right button. The selected digit will blink. Change the blinking digit by pressing the Left button.
0 in	<u>Installation ZERO</u> , matches the Indicator to the installed Load Cell and to the helicopter. After this procedure the display will be zero when no load is on the Cargo Hook.	Display is a combination of load on the Load Cell, and normal load cell zero offset. Remove all weight from the installed Load Cell except the Cargo Hook, and press any button to complete the procedure and return to the Run Mode.
LOAD	<u>Load</u> , is used to calibrate the system by lifting a known load.	No previous display is shown. Enter the known load using the Right button to select the digit to be changed and Left button to enter the number. Known load is entered "X 10" i.e.; 5000 kilograms is entered as 500. After the known load is entered, press both buttons at the same time and lift the known load. When the load is stabilized press either button. A new Calibration Code will be calculated and the known load will be displayed. This completes the procedure.
Scale	<u>Scale</u> , matches the analog output of the Indicator to an optional remote analog meter.	Display is previously entered number. To change the number use the Right button to select a digit, use the Left button to scroll the digit to the desired number. Entry is times 10.
LB KG	<u>Units</u> , selects the Indicator units (pounds or kilograms).	Display is previously selected unit. To change the unit, use the Left button.
XX - V	<u>Version</u> , is the revision level of the Indicator hardware and software.	Version is for information only, it cannot be changed.

The Setup Mode, continued


Indicator Dampening

The Damp or dampening routine allows the pilot to adjust the Indicator dampening level to his preference. The dampening routine is a program that stabilizes the Indicator reading. It offers a trade-off between Indicator responsiveness and stability. Ten dampening levels are available, from 0 through 9. At level 0 the display responds to the slightest change in weight. However, if the load bounced even slightly, the display digits would respond instantly, making the display look unstable. With a dampening level of 9, the display would be stable under the most turbulent conditions, however, it would take several seconds for the display to respond to a change in weight. The ideal dampening level will depend on the flying conditions. A mid range setting of 5 or 6 is usually adequate.

To Look at or Change the Dampening Level

With the Indicator powered up and in the Run Mode, press both buttons at the same time to go to Setup. Scroll through the menu, using the Left button, until the word DAMP is displayed. To look at or change the Dampening Level press the Right button. The display should look like this:

Figure 3.5 Changing Dampening Level

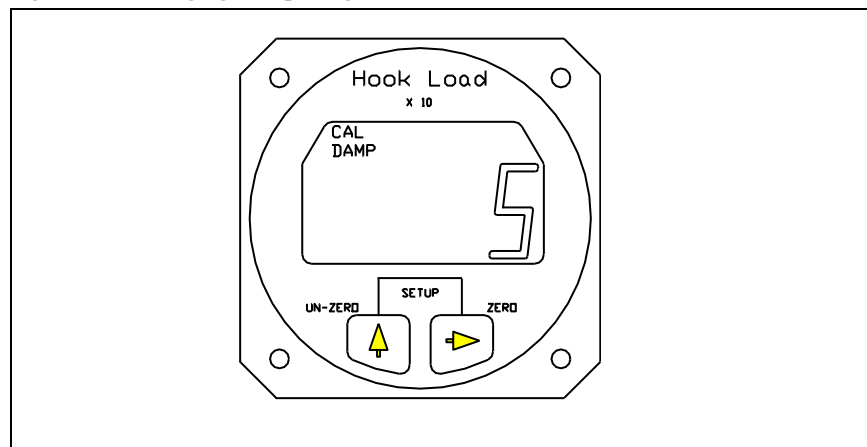

The CAL and the DAMP legend is turned on and the previously set dampening level is displayed. To return to Run without changing the current dampening level press both the Right and Left buttons at the same time. To change the dampening number, use the Left button to scroll the blinking digit to the desired number. After the selection has been made press both the Right and Left buttons at the same time to return to Run.

The Setup Mode, continued

Indicator Calibration


The Calibration Code, or CAL code, is a mandatory input. The Indicator will not accurately display the load without the correct Calibration Code. The Calibration Code scales the signal from the Load Cell.

If the C-39 Indicator was supplied as part of a Load Weigh System, the Calibration Code will have been entered into the Indicator by the factory, however, it should be confirmed. If the Indicator is to be mated to a different Load Cell, it must be calibrated before use. Calibration can be done by entering a known Calibration Code or by lifting a known load and having the Indicator calibrate itself. Both options are discussed below.

To Look at or Change the Calibration Code

With the Indicator powered up and in the Run Mode, press both buttons at the same time to go to Setup. Scroll through the menu until the word CODE is displayed, then press the Right button. The display should look like this:

Figure 3.6 Changing the CAL Code

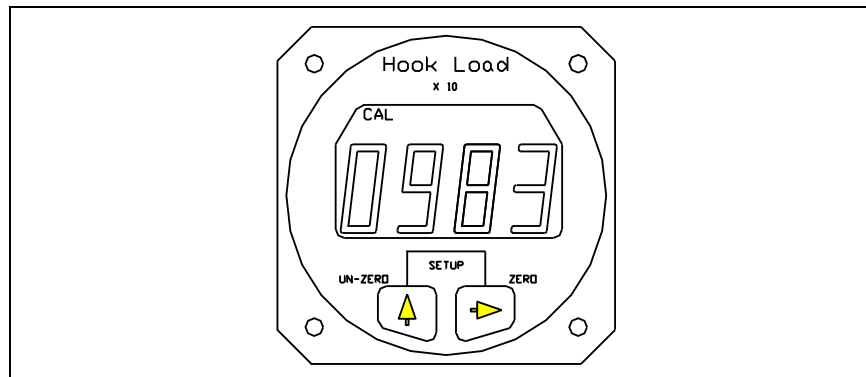

The CAL legend is turned on and the previously entered or computed Calibration Code is displayed. To return to Run without changing the CAL Code, press both the Right and Left buttons at the same time. To change the Calibration Code, use the Right button to select the digit to be changed, then use the Left button to scroll the blinking digit to the desired number. When the Calibration Code has been entered, press both the Right and Left button at the same time to return to Run.

NOTICE

Depending on the type of Load Cell, the Calibration code could be a 3 or 4 digit number. If the Calibration Code is a 3 digit number a leading zero (0) must be used. For example if a Load Cell had a CAL Code of 395 it would be entered as 0395.

The Setup Mode, continued

To Look at or Change the Calibration Code, continued

If the load cell Calibration Code is not known or as a cross check, the Indicator can generate the Calibration Code. This is done by entering the weight of a known load into the Indicator LOAD routine and then lifting the load. See the section *Calibration by Lifting a Known Load*.

Installation Zero

Installation zero is a routine that matches the Indicator to the ***INSTALLED*** Load Cell. It adjusts the Indicator reading to compensate for the weight of the Cargo Hook on the Load Cell and whatever zero offset is built into the Load Cell. The Installation Zero procedure is not mandatory. If done the Indicator will read zero when the Un-Zero button is pressed and there is no weight on the Cargo Hook. If the Installation Zero is not done, the Indicator will show the weight of the Cargo Hook plus the value of the Load Cell zero offset.

To Run the Installation Zero Routine

With the Indicator powered up and in the Run Mode, press both buttons at the same time to go to Setup. Scroll through the menu until the symbol "0 in" is displayed, then press the Right button. The CAL legend will be turned on and the current weight on the Cargo Hook will be displayed and blinking. Remove any weight that is not to be zeroed out and press either button to complete the procedure and return to the Run Mode.

Calibration by Lifting a Known Weight

Calibration by lifting a known weight is a Setup routine that calculates the Calibration Code for the Load Cell attached to the Indicator. It is useful if the load cell Calibration Code is not known or as a cross check to the accuracy of a known Calibration Code. The procedure is done by entering the known weight into the Indicator and then lifting the weight. This procedure can be done in the shop or on the helicopter. The accuracy of the procedure is directly related to the weight of the known load. If for example the procedure was done with a 1,000 pound load that was assumed to weigh only 900 pounds, all subsequent lifts would be displayed 10% light.



Be sure to include the weight of everything between the Cargo Hook and the load, i.e. the cable, net, dirt, etc.


The closer the known load approaches the lifting capacity of the helicopter, the more accurate the calculated Calibration Code will be.

The Setup Mode, continued

To Run the Calibration by Lifting a Known Weight Routine

With the Indicator powered up and in the Run Mode, press both buttons at the same time to go to Setup. Scroll through the menu until the word LOAD is displayed, then press the Right button. The display should look like this:


Figure 3.7 Running CAL Routine

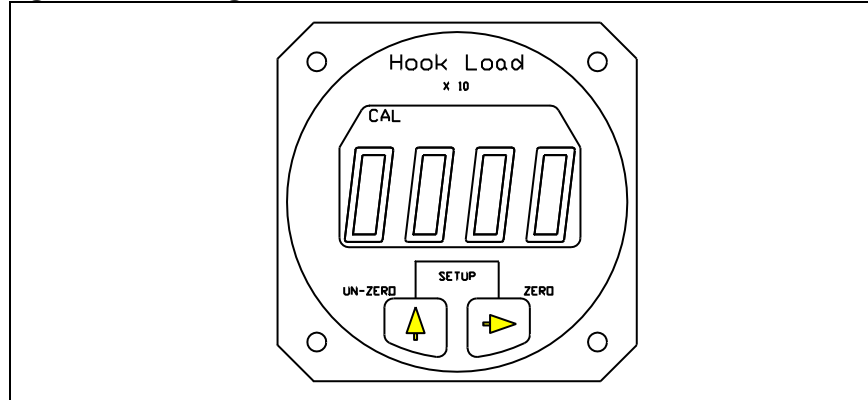

The CAL legend is turned on and the first digit is blinking. The previous load is not displayed. At this point if you wish to return to the Run Mode without changing the Calibration Code, power cycle the Indicator. At this point it is not possible to return to the Run Mode without changing the Calibration Code by using the buttons on the Indicator front panel.

To proceed with the procedure, use the Right button to select the digit to be changed, then use the Left button to scroll the blinking digit to the desired number. Note that the known weight is entered "X 10"; a 1000 pound load is entered as 100. When the known load has been entered, press both the Right and Left button at the same time. The display will look like this:

Figure 3.8 Entering Load in CAL Routine

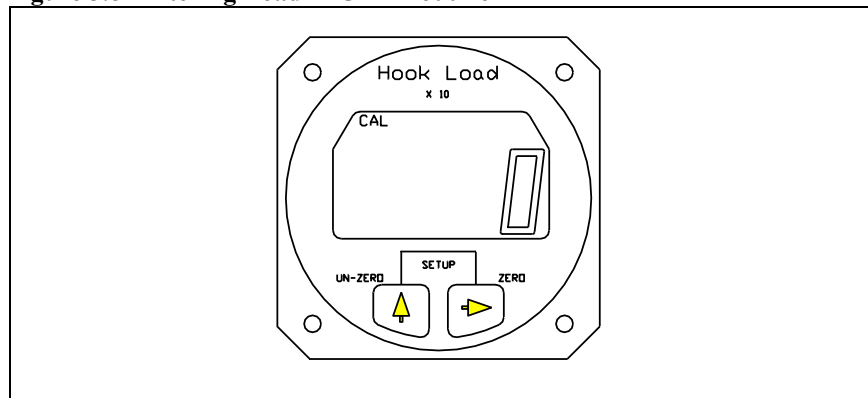

The Setup Mode, continued

Calibration by Lifting a Known Weight, continued

The CAL legend and the digits will be blinking. Again, at this point if you wish to return to the Run Mode without changing the Calibration Code, power cycle the Indicator. It is not possible to return to the Run Mode by using the buttons on the Indicator front panel without changing the Calibration Code. If you wish to proceed, lift the known load and when it is stabilized, press either button to complete the procedure. The Indicator will display the load. This ends the procedure. The Indicator is now calibrated to the Load Cell. It is a good practice to go to the Code routine and record the new Calibration code for later reference.

Setting the Scale for a remote analog meter


The Scale routine is used when a user supplied analog meter is connected to the Indicator. It is used to match or calibrate the analog meter to the Indicator. The Indicator outputs a 0 to 5 VDC analog signal, which is proportional to the Load Cell load. The Scale number tells the Indicator at what point in pounds or kilograms it should reach the 5 VDC output. If for example a 5 volt analog meter is used and its full scale reading is 10,000 pounds, the number entered into the Indicator Scale routine would be 1000 (the number is entered X 10). This number tells the Indicator that it should output the proportional 0 to 5 VDC signal between zero pounds and 10,000 pounds.

The Scale number does not affect Onboard Slave Meters, P/N 210-106-00 or 210-180-00. This number only affects user supplied instruments connected to the analog out signal.

To Look at or Change the Scale

With the Indicator powered up and in the Run Mode, press both buttons at the same time to go to Setup. Scroll through the menu until the word SCALE is displayed, then press the Right button. The display should look like this:

Figure 3.9 Changing the Scale

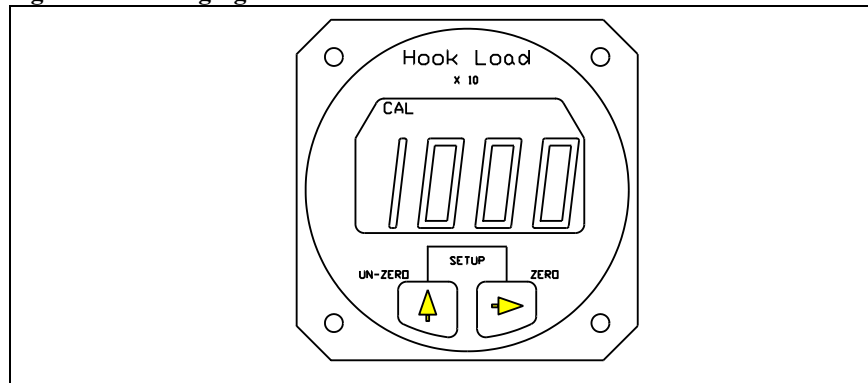

The Setup Mode, continued

To Look at or Change the Scale, continued

The CAL legend is turned on and the previously set Scale number is displayed. To return to Run without changing the Scale, press both the Right and Left button at the same time. To change the Scale number, use the Right button to select a digit to be changed, then use the Left button to scroll the blinking digit to the desired number. When the complete Scale number has been entered, press both the Right and Left button at the same time to return to Run.


Select KG or LB Units

The units routine sets the display to read in pounds (LB) or kilograms (KG).

To look at or change the Units

With the Indicator powered up and in the Run Mode, press both buttons at the same time to go to Setup. Scroll through the menu until the word LB or KG is displayed, then press the Right button. The display should look like this:

Figure 3.10 Changing the Units

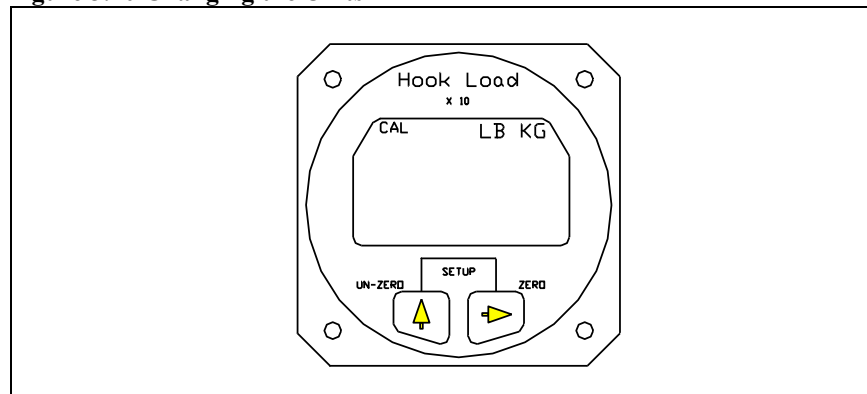

The CAL legend is turned on and the previously set unit is displayed. To return to Run without changing the units, press both the Right and Left button at the same time. To change the units press the Left button. When the selection has been made, press both the Right and Left button at the same time to return to Run.

NOTICE


The selected units are displayed when in the Run Mode.

The Setup Mode, continued

Indicator Version

The Version routine displays the Indicator's hardware and software revision levels. Version is set at the factory and cannot be changed.

Figure 3.11 Looking at Indicator Version

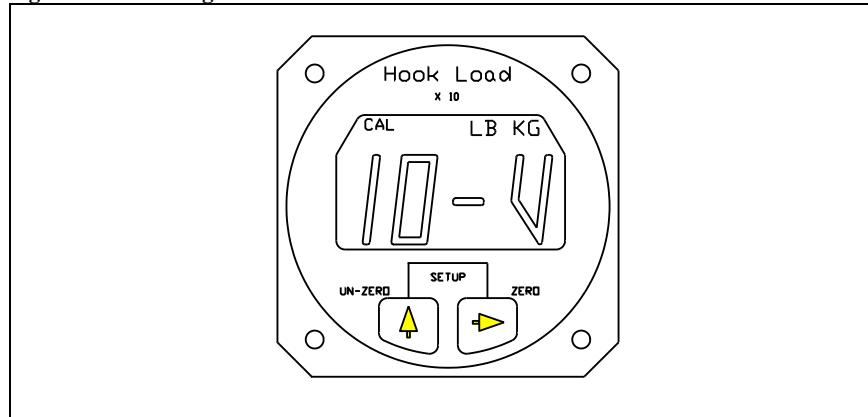

This page intentionally left blank.

Section 4

Operation Instructions

Operating Procedures

Prior to a flight involving external load operations perform the following:

1. Be completely familiar with this Owner's Manual, Cargo Hook Service Manual 122-005-00 and the ICA Manual 123-011-01.
2. Activate the electrical system and press the Cargo Hook release button to ensure the cargo hook electrical release is operating correctly. The Cargo Hook must release. Reset the hook by hand after the release. If the hook does not release or relatch, do not use the unit until the difficulty is resolved.

CAUTION

The cargo hook release solenoid is intended to be energized only intermittently. Depressing the electrical release button continuously in excess of 20 seconds will cause the release solenoid to overheat, possibly causing permanent damage.


3. Activate the manual release lever to test the cargo hook manual release mechanism. The mechanism should operate smoothly and the Cargo Hook must release. Reset the hook by hand after release. If the hook does not release or relatch, do not use the unit until the difficulty is resolved.
4. Swing the installed Cargo Hook and the suspension to ensure that the manual release cable assembly and the electrical cables have enough slack to allow full swing of each component without straining or damaging the cables. The cables must not be the stops that prevent the Cargo Hook or the suspension from swinging freely in all directions.
5. Visually check for presence and security of fasteners, and condition of cables. Swing the Cargo Hook and the suspension in fore and aft and side to side directions to check for freedom of rotation at all joints.

Disconnecting Removable Provisions

For helicopter missions in which the cargo hook swing suspension system is not needed, its removable provisions may be removed per the following instructions.


1. Remove the removable section of the manual release cable by unclipping it from the bracket on the belly of the helicopter, disengaging the locking pin and unthreading the Adapter Fitting. Unclip the Release Cable Cap (see below) from the bracket and thread it over the open end of the fixed manual release cable assembly and clip it into the inboard spring clip on the bracket.

Figure 4.1 Manual Release Cable Removal

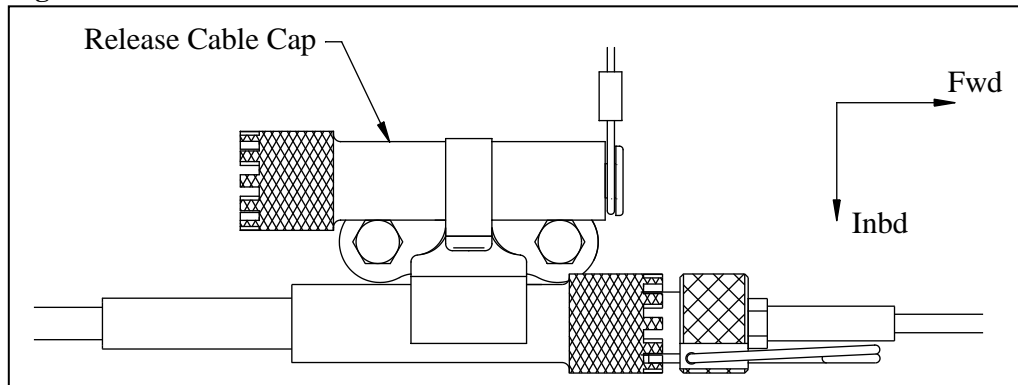

2. Disconnect the electrical cables and the ground strap at the belly of the helicopter.
3. Remove the Swing Suspension by removing the safety pins and then the quick release pins that secure the cables to each of Shackle Assemblies at the aircraft hard points.


Figure 4.2 Suspension Removal

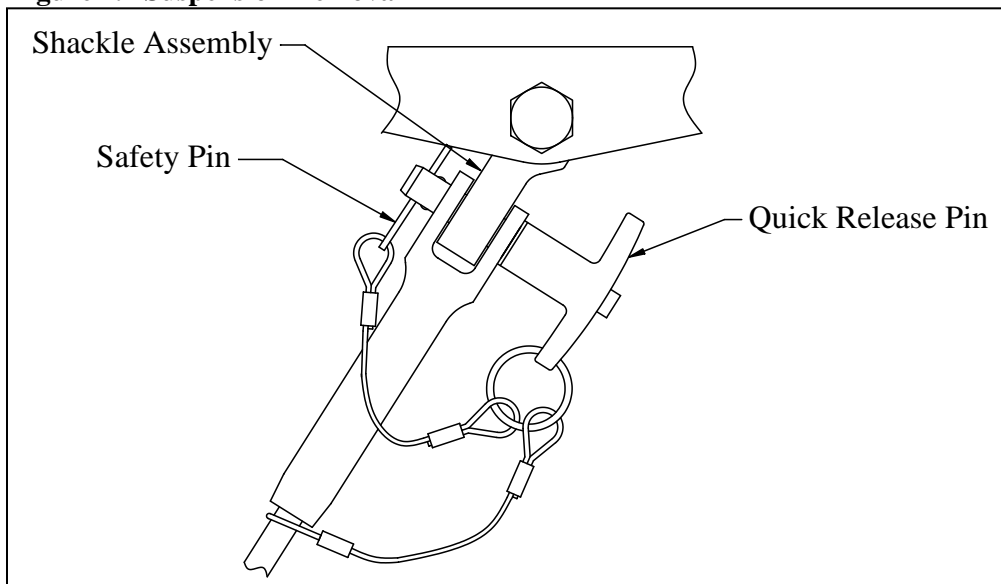

Cargo Hook Loading

The cargo hook can easily be loaded with one hand. A load is attached to the hook by pushing the ring upward against the upper portion of the load beam throat, as illustrated in Figure 4.3, until an internal latch engages the load beam and latches it in the closed position.

Figure 4.3 Cargo Hook Loading

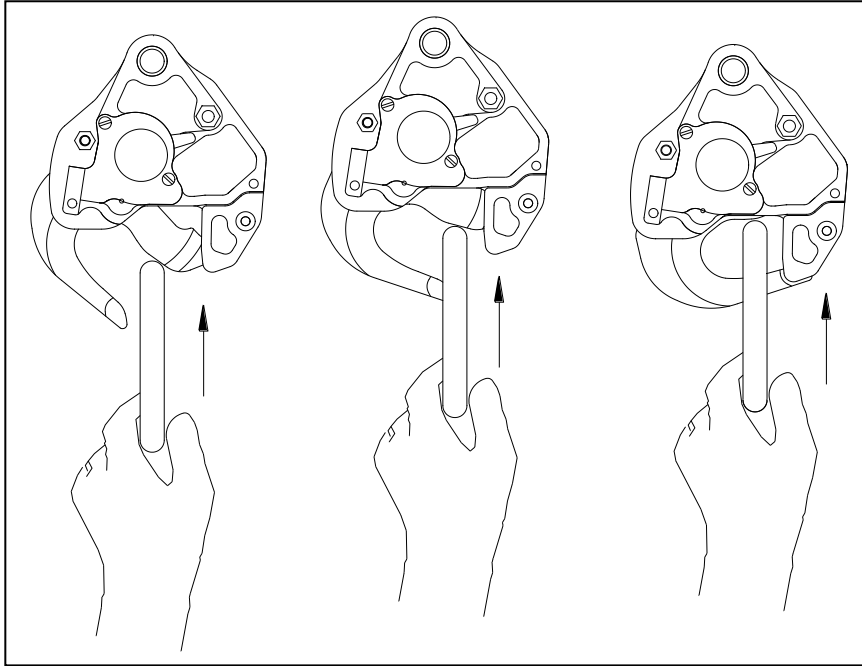

Cargo Hook Rigging

Extreme care must be exercised when rigging a load to the Cargo Hook. Steel load rings are recommended to provide consistent release performance and resistance to fouling. The following illustration shows the recommended rigging and rigging to avoid but is not intended to represent all rigging possibilities.




Some combinations of small primary rings and large secondary rings could cause fouling during release. It is the responsibility of the operator to assure the cargo hook will function properly with each rigging.

Cargo Hook Rigging, continued



*Nylon type straps (or similar material) or rope must not be used directly on the cargo hook load beam. If nylon straps or rope must be used they should be first attached to a steel primary ring. Verify that the ring will freely slide off the load beam when it is opened. Only the primary **ring** should be in contact with the cargo hook load beam.*

Figure 4.4 Example of Recommended Cargo Hook Rigging

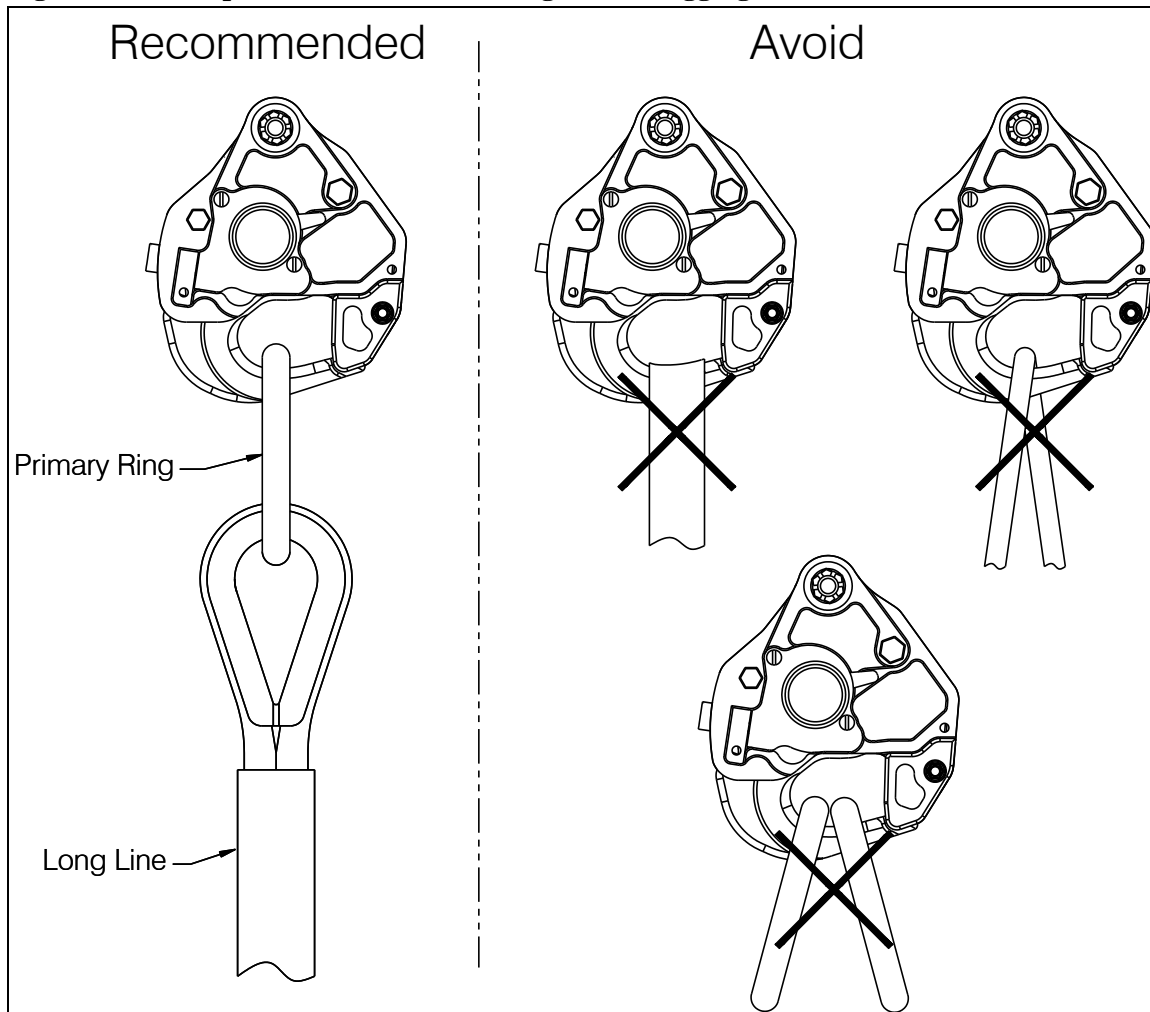

Section 5

Maintenance

Refer to the Instructions for Continued Airworthiness (ICA) manual 123-011-01 for maintenance of the cargo hook suspension system. For maintenance of the cargo hook refer to Cargo Hook Component Maintenance Manual 122-005-00.

Instructions for Returning Equipment to the Factory

If an Onboard Systems product must be returned to the factory for any reason (including returns, service, repairs, overhaul, etc) obtain an RMA number before shipping your return.



An RMA number is required for all equipment returns.

- To obtain an RMA, please use one of the listed methods.
 - Contact Technical Support by phone or e-mail (Techhelp@OnboardSystems.com).
 - Generate an RMA number at our website: <http://www.onboardsystems.com/rma.php>
- After you have obtained the RMA number, please be sure to:
 - Package the component carefully to ensure safe transit.
 - Write the RMA number on the outside of the box or on the mailing label.
 - Include the RMA number and reason for the return on your purchase or work order.
 - Include your name, address, phone and fax number and email (as applicable).
 - Return the components freight, cartage, insurance and customs prepaid to:

Onboard Systems
13915 NW 3rd Court
Vancouver, Washington 98685
USA
Phone: 360-546-3072


This page intentionally left blank.



Section 6

System Part Numbers


210-201-01 AS 350 Swing Removable Provisions

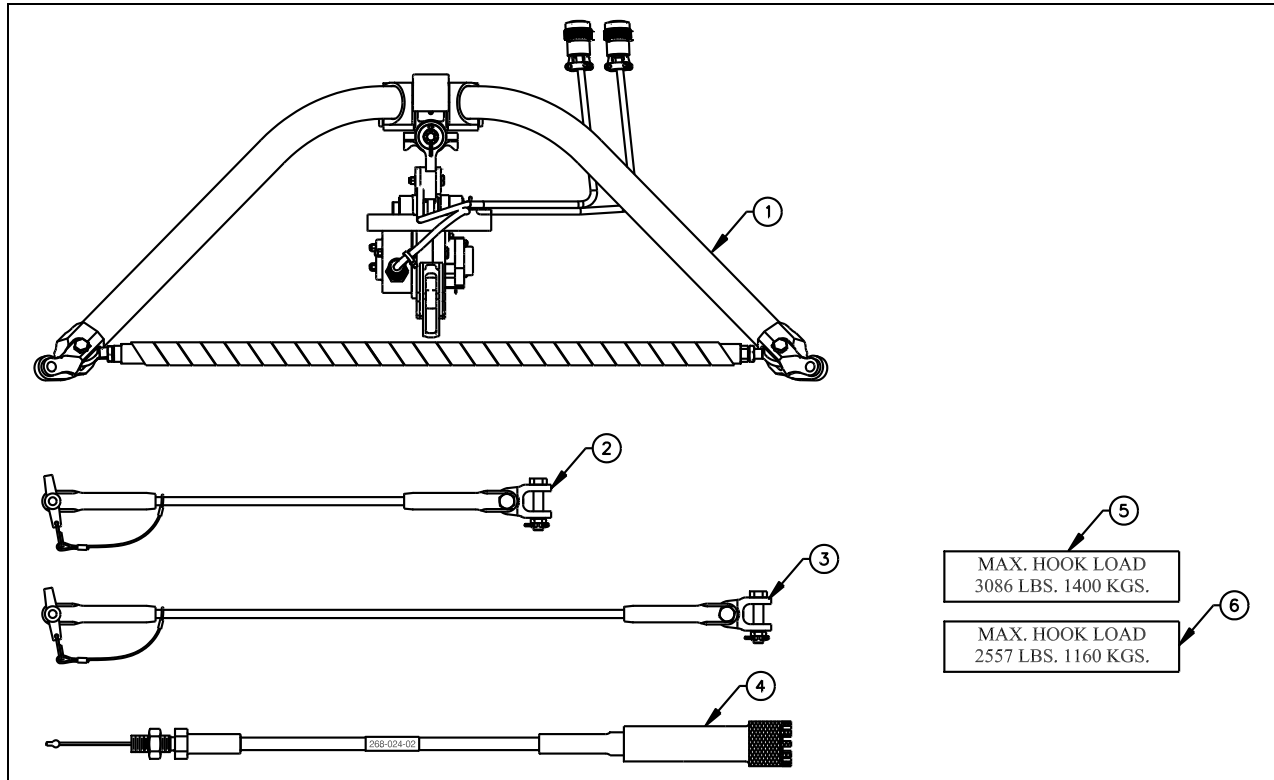

Item	Part Number	Description	Qty
1	232-145-01	Hook Frame Assembly	1
2	232-140-01	Forward Attach Cable Assembly	2
3	232-141-01	Aft Attach Cable Assembly	2
4	268-024-02	Manual Release Cable Assembly	1
5	215-166-00	Max Hook Load 3086 Decal	1
6	215-168-00	Max Hook Load 2557 Decal	1

System Part Numbers continued


210-202-01 AS 350 Swing Fixed Provisions

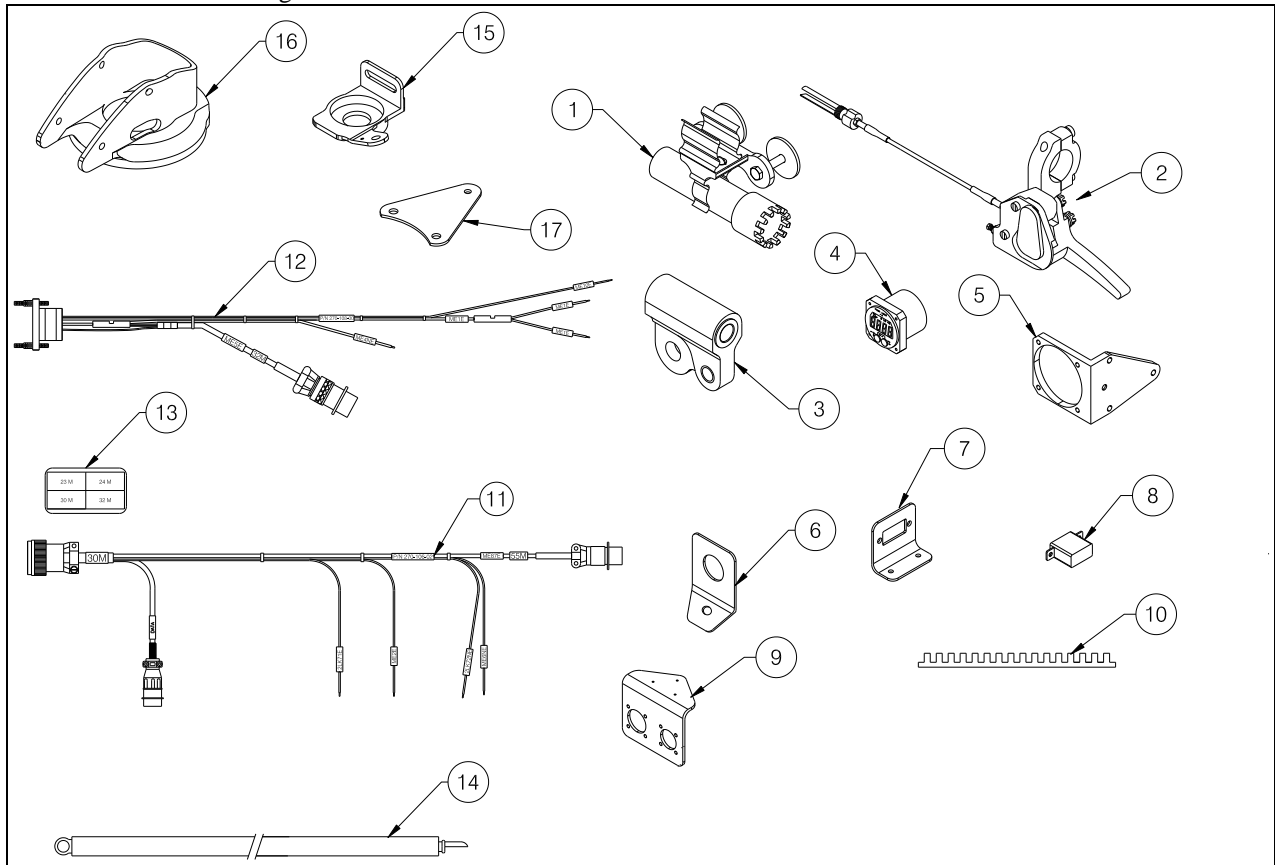

Item	Part Number	Description	Qty
1	232-151-00	Fixed Quick Disconnect Assembly	1
2	232-150-00	Release Handle Assembly	1
3	232-137-01	Shackle Assembly	4
4	210-095-00	C-39 Indicator Assembly	1
5	290-772-00	Indicator Mount Bracket	1
6	290-780-00	Cable Attach Bracket	1
7	290-783-00	Relay Bracket	1
8	445-005-00	Relay	1
9	290-782-00	Connector Bracket	1
10	500-065-00	Grommet Edging	1
11	270-106-02	Load Weigh Internal Harness	1
12	270-108-00	Electrical Release Internal Harness	1
13	215-165-00	Multiple Sticker Sheet	1
14	270-125-00	Ground Strap	1
15	290-888-00	Retainer	1
16	290-889-01	Guard	1
17	290-893-00	Bracket	1

System Part Numbers continued


232-137-01 Shackle Assembly

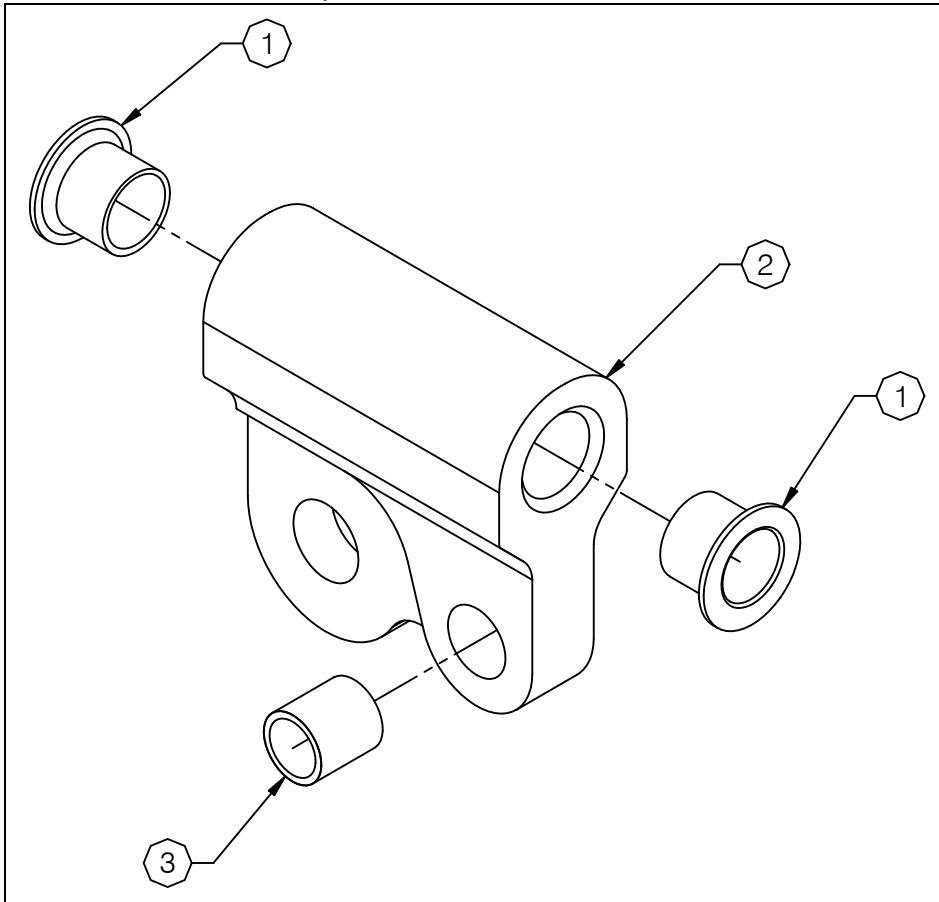

Item	Part Number	Description	Qty
1	517-047-00	Bushing	2
2	290-850-00	Airframe Attach Fitting	1
3	517-016-00	Bushing	1

System Part Numbers continued


232-150-00 Release Handle Assembly

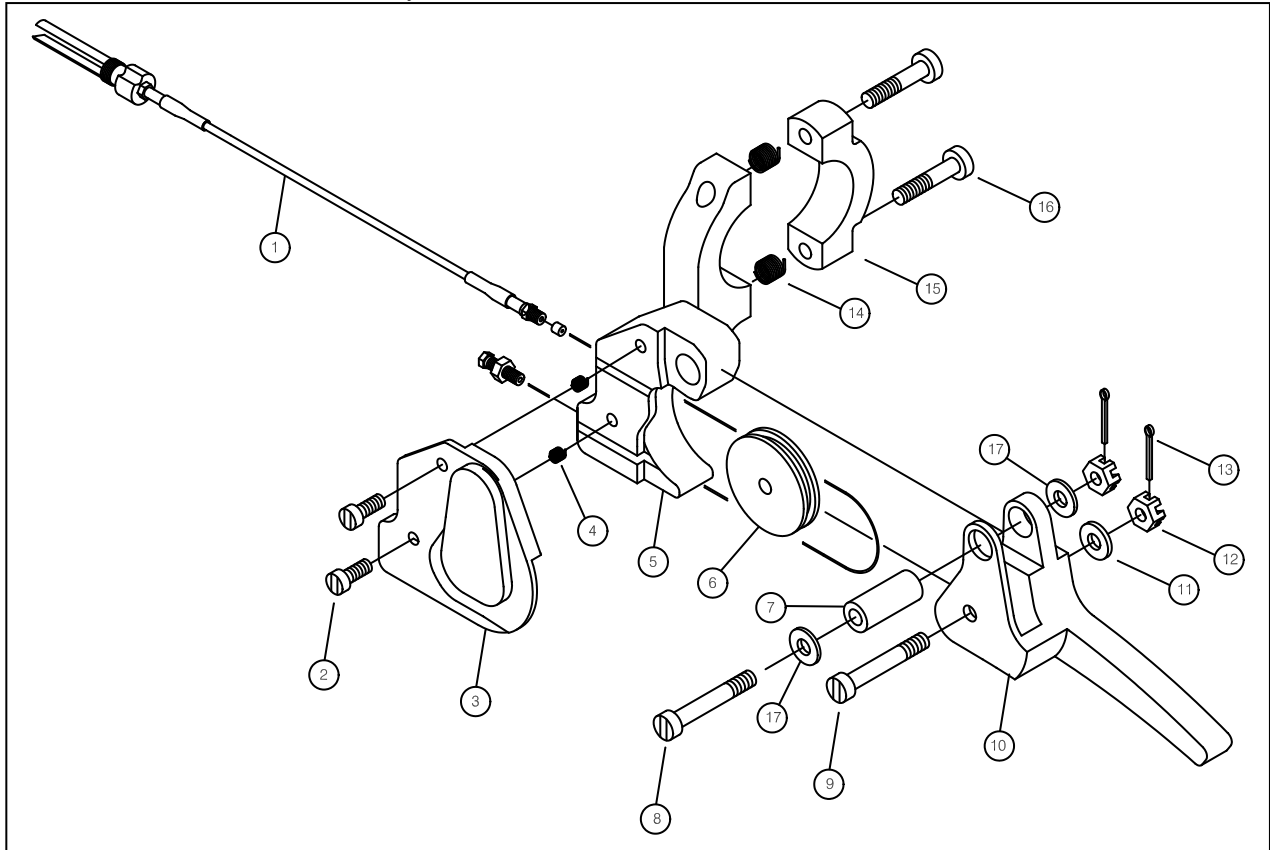

Item	Part Number	Description	Qty
1	268-025-00	Fixed Manual Release Cable	1
2	510-215-00	Cover Screws	2
3	290-757-00	Cover	1
4	510-210-00	8-32 Locking Heli-Coil	2
5	290-754-00	Lever Body	1
6	517-049-00	Pulley	1
7	290-759-00	Shaft	1
8	510-450-00	Bolt, Handle pivot	1
9	510-449-00	Bolt, Pulley Pivot	1
10	290-755-00	Handle	1
11	510-042-00	Washer	1
12	510-082-00	Nut	2
13	510-125-00	Cotter Pin	2
14	510-248-00	10-32 Heli-Coil	2
15	290-753-00	Clamp Half	1
16	510-390-00	Screw, Mounting Clamp	2
17	510-095-00	Washer	2

System Part Numbers continued


232-151-00 Quick Disconnect Support Assembly

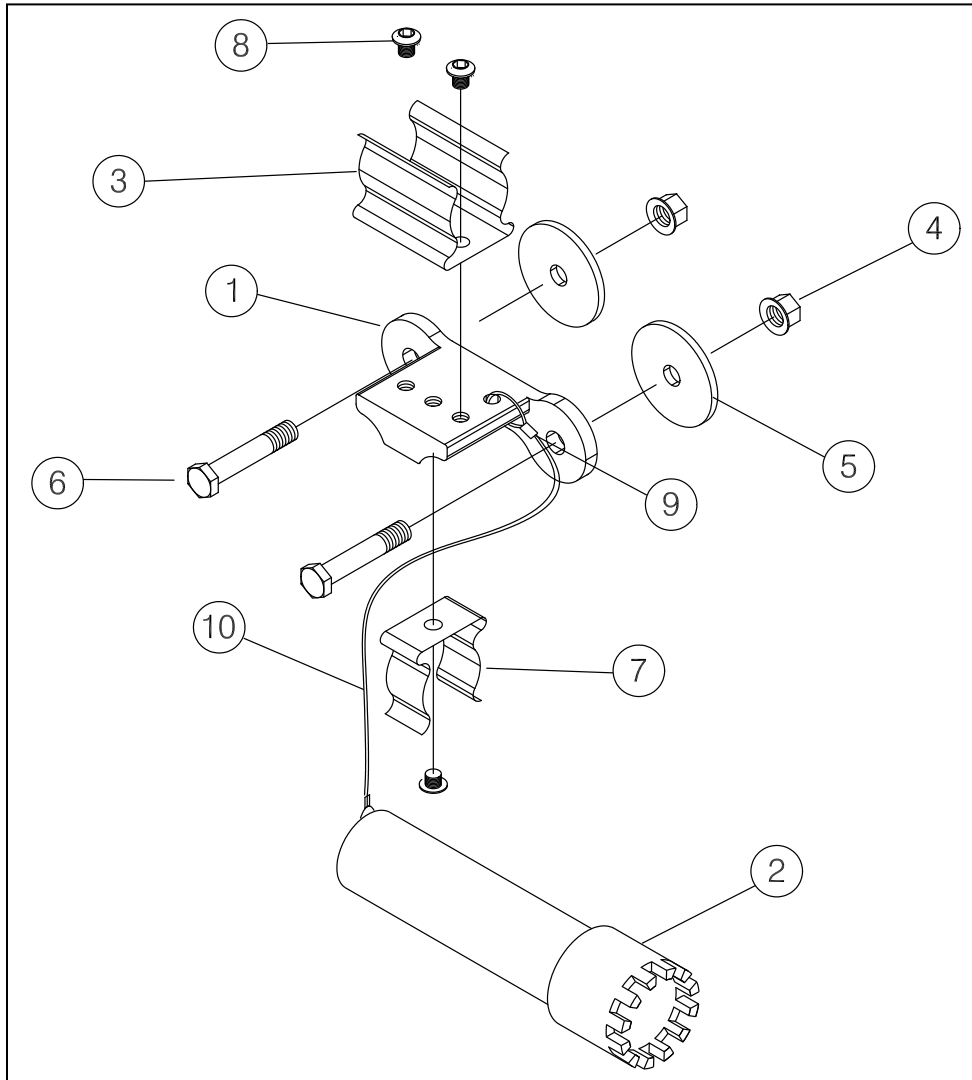

Item	Part Number	Description	Qty
1	290-797-00	Attach Bracket	1
2	290-791-00	Release Cable Cap	1
3	514-053-00	Spring Clip	1
4	510-102-00	Nut	2
5	510-085-00	AN 970-3	2
6	510-455-00	NAS 6603-13	2
7	514-050-00	Spring Clip	1
8	510-211-00	Button Head Screw	3
9	531-016-00	Crimp Sleeve	2
10	531-015-00	Lanyard	6"

System Part Numbers continued


232-140-01 Forward Attach Cable

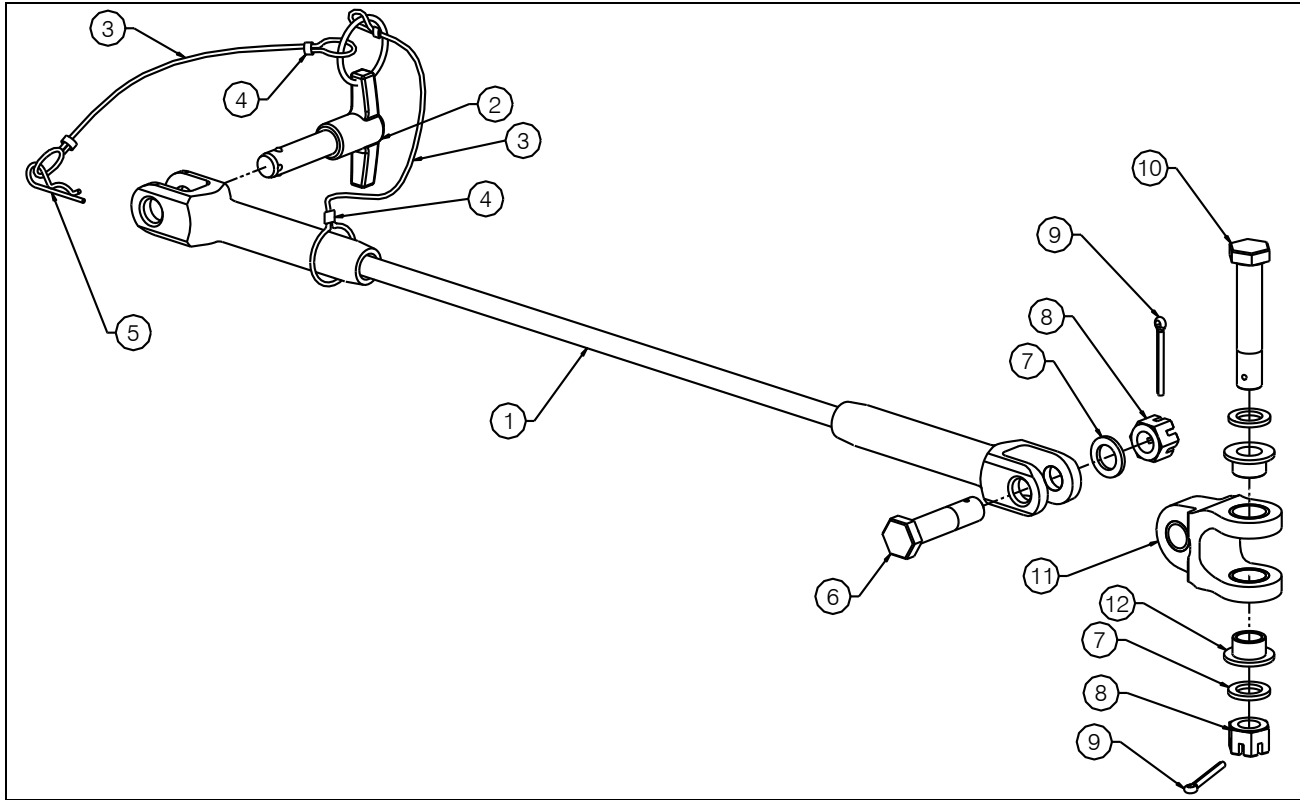

Item	Part Number	Description	Qty
1	232-177-00	Forward Attach Cable	1
2	290-851-00	Quick Release Pin	1
3	531-015-00	Lanyard Cable	2
4	531-016-00	Crimp Sleeve	2
5	510-464-00	Hitch Pin	1
6	510-438-00	Bolt	1
7	510-221-00	Washer	3
8	510-440-00	3/8" Castellated Nut	2
9	510-178-00	Cotter Pin	2
10	510-439-00	Bolt	1
11	232-142-00	Lower Attach Gimbal Assembly	1
12	290-749-00	Standoff Bushing	2

System Part Numbers continued


232-141-01 Aft Attach Cable Assembly

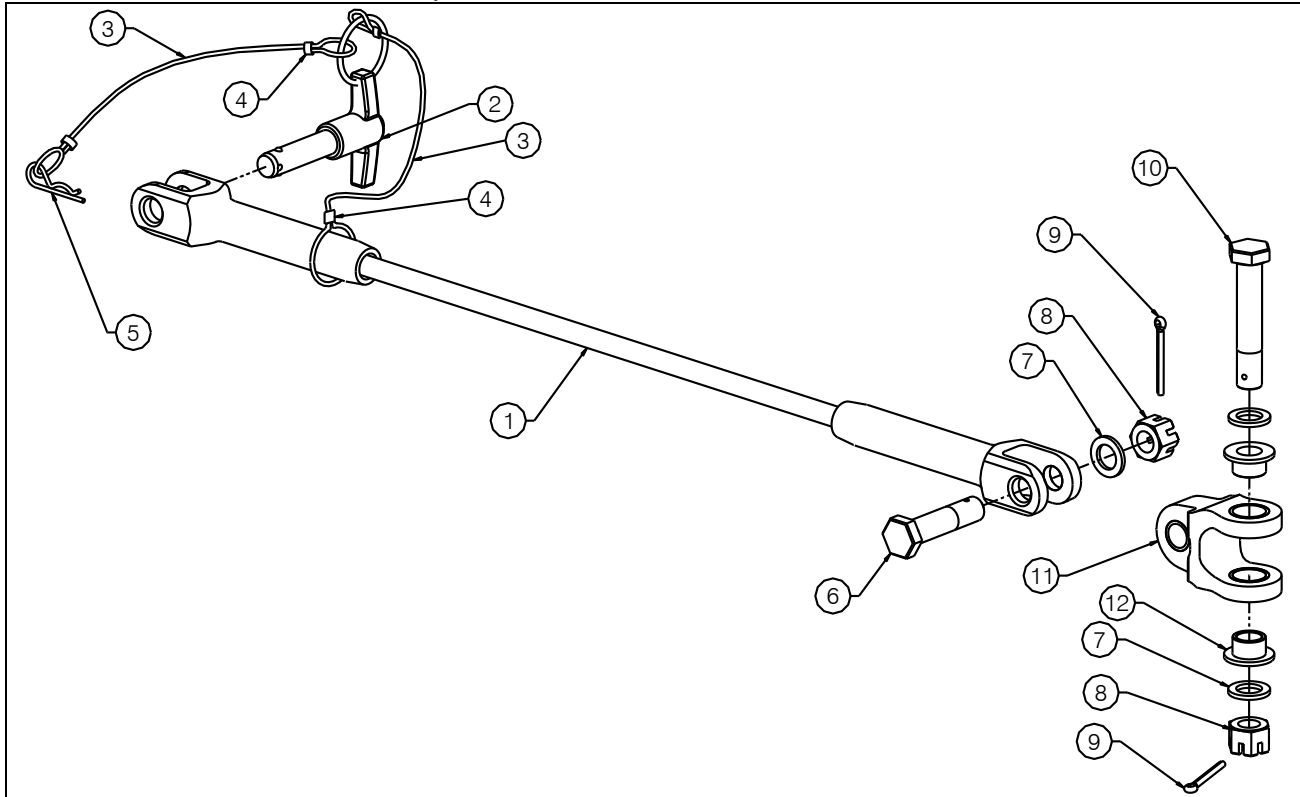

Item	Part Number	Description	Qty
1	232-178-00	Aft Attach Cable	1
2	290-851-00	Quick Release Pin	1
3	531-015-00	Lanyard Cable	2
4	531-016-00	Crimp Sleeve	2
5	510-464-00	Hitch Pin	1
6	510-438-00	Bolt	1
7	510-221-00	Washer	3
8	510-440-00	3/8" Castellated Nut	2
9	510-178-00	Cotter Pin	2
10	510-439-00	Bolt	1
11	232-142-00	Lower Attach Gimbal Assembly	1
12	290-749-00	Standoff Bushing	2

System Part Numbers continued


232-142-00 Lower Attach Cable Gimbal Assembly

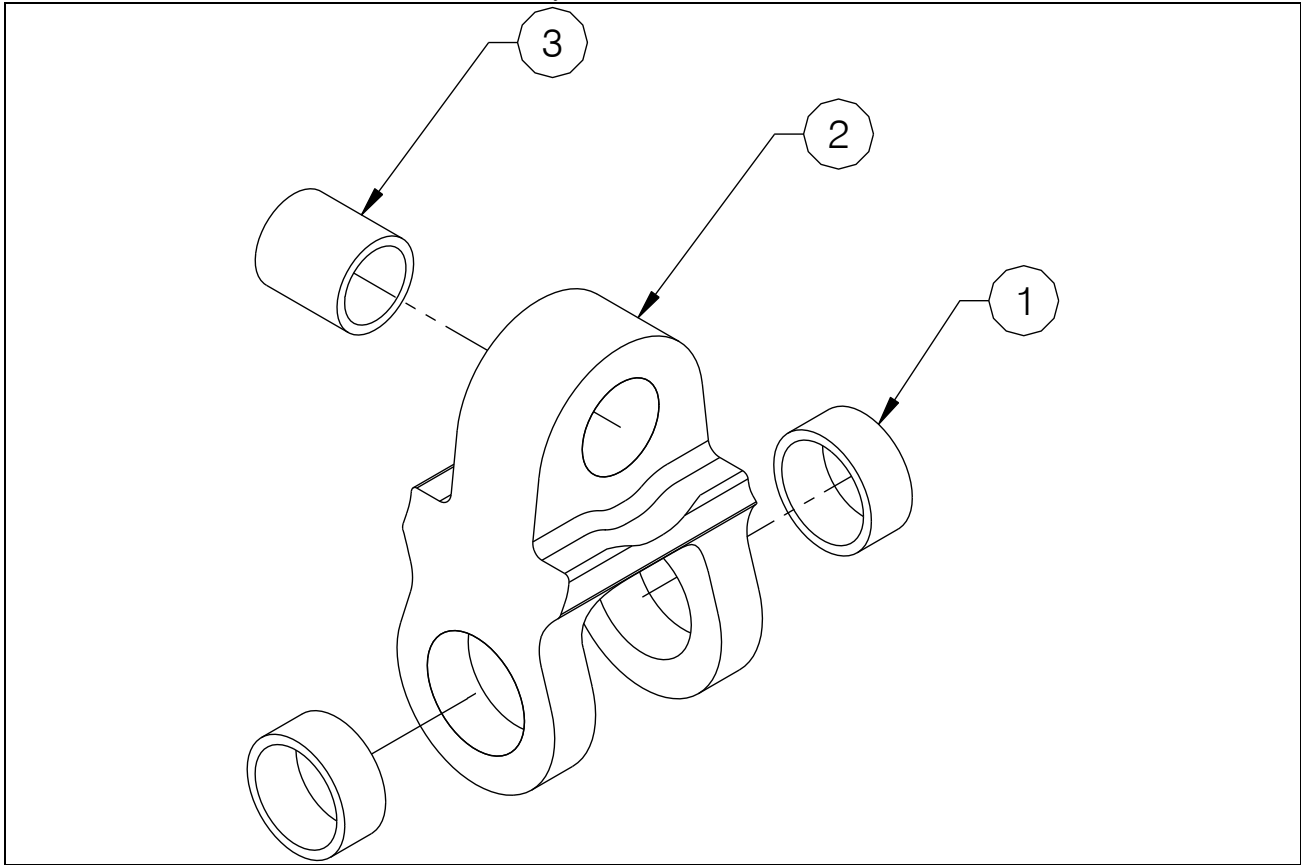

Item	Part Number	Description	Qty
1	517-048-00	Bushing	2
2	290-746-00	Lower Cable Gimbal	1
3	517-016-00	Bushing	1

System Part Numbers continued


232-143-01 Loadcell Gimbal Assembly

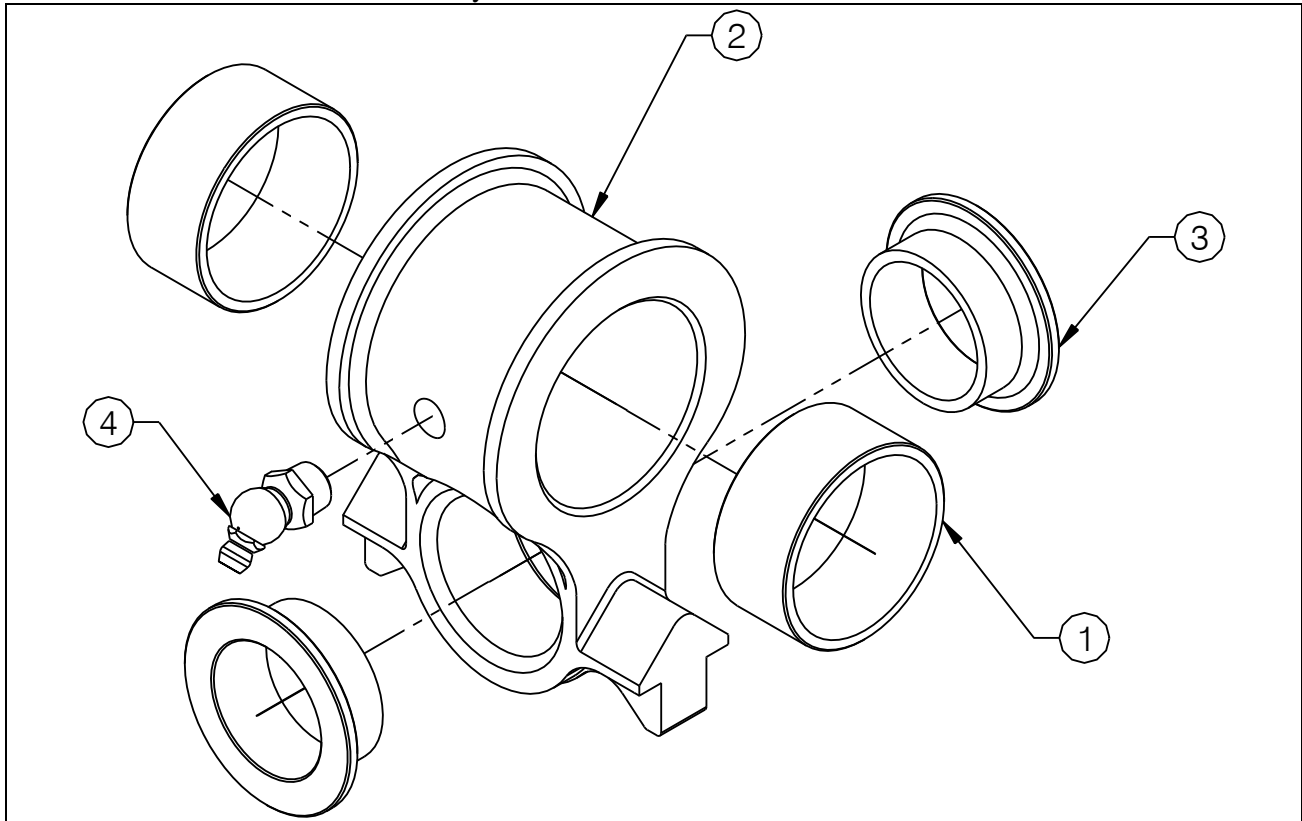

Item	Part Number	Description	Qty
1	517-056-00	Bushing Upper Hook Gimbal	2
2	290-841-00	Gimbal Link	1
3	517-046-00	Bushing Lower Hook Gimbal	2
4	518-003-00	Grease Fitting	1


System Part Numbers continued

232-145-01 Swing Hook-Frame Assembly

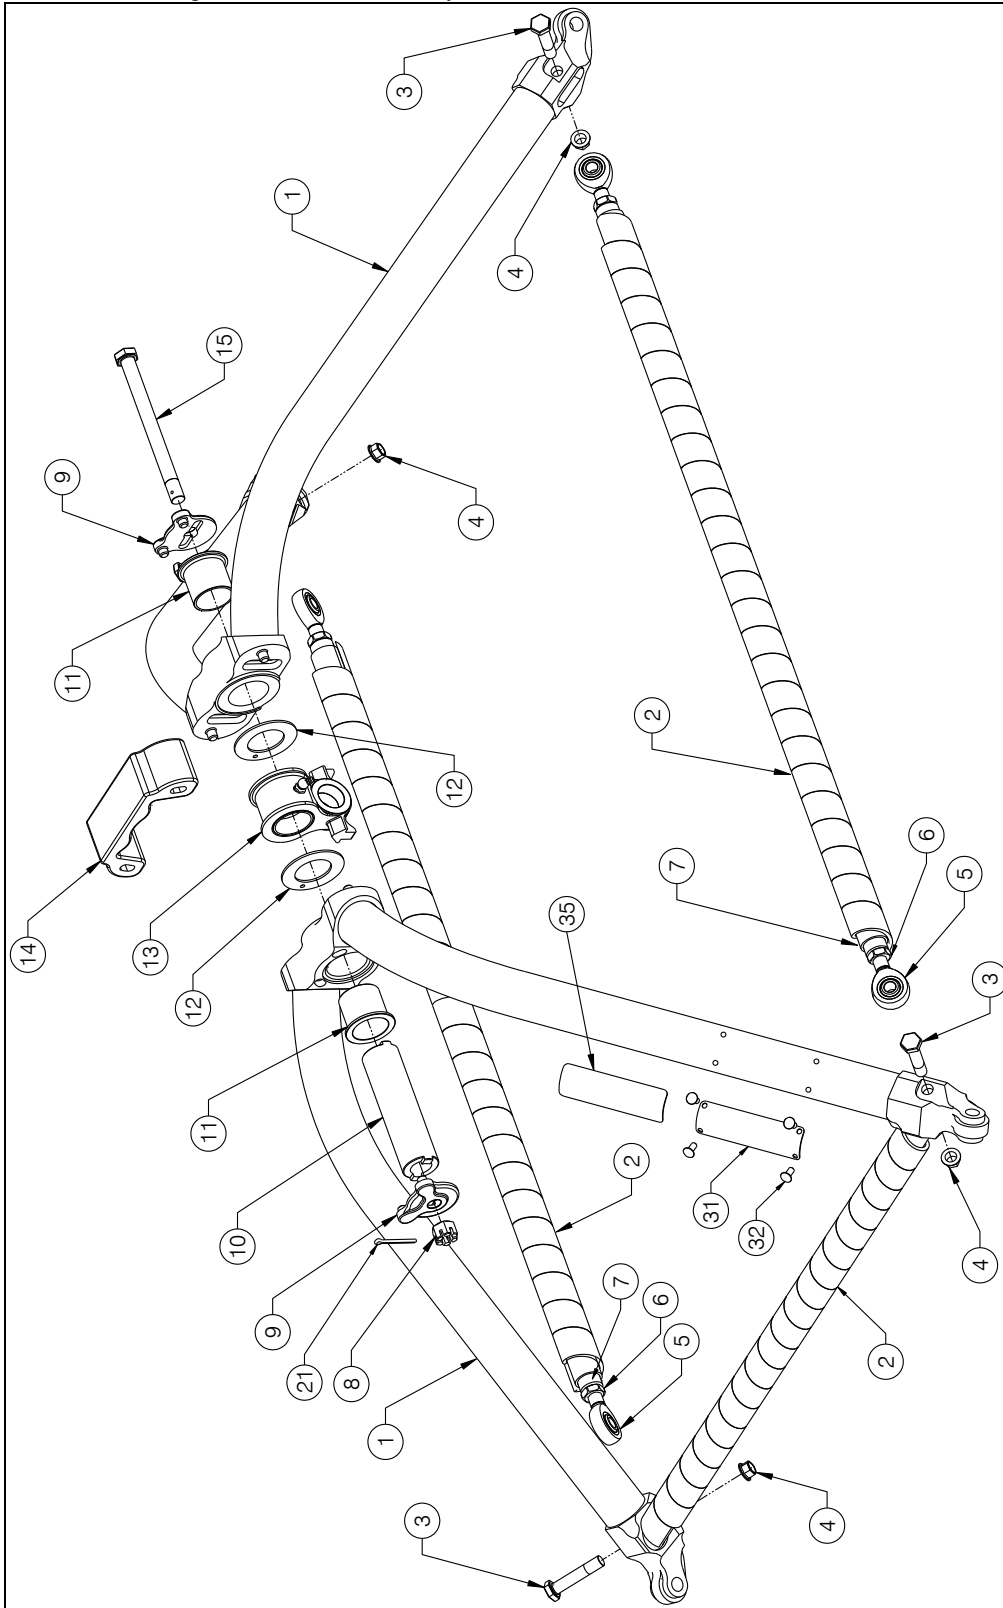

System Part Numbers continued

232-145-01 Swing Hook-Frame Assembly, continued

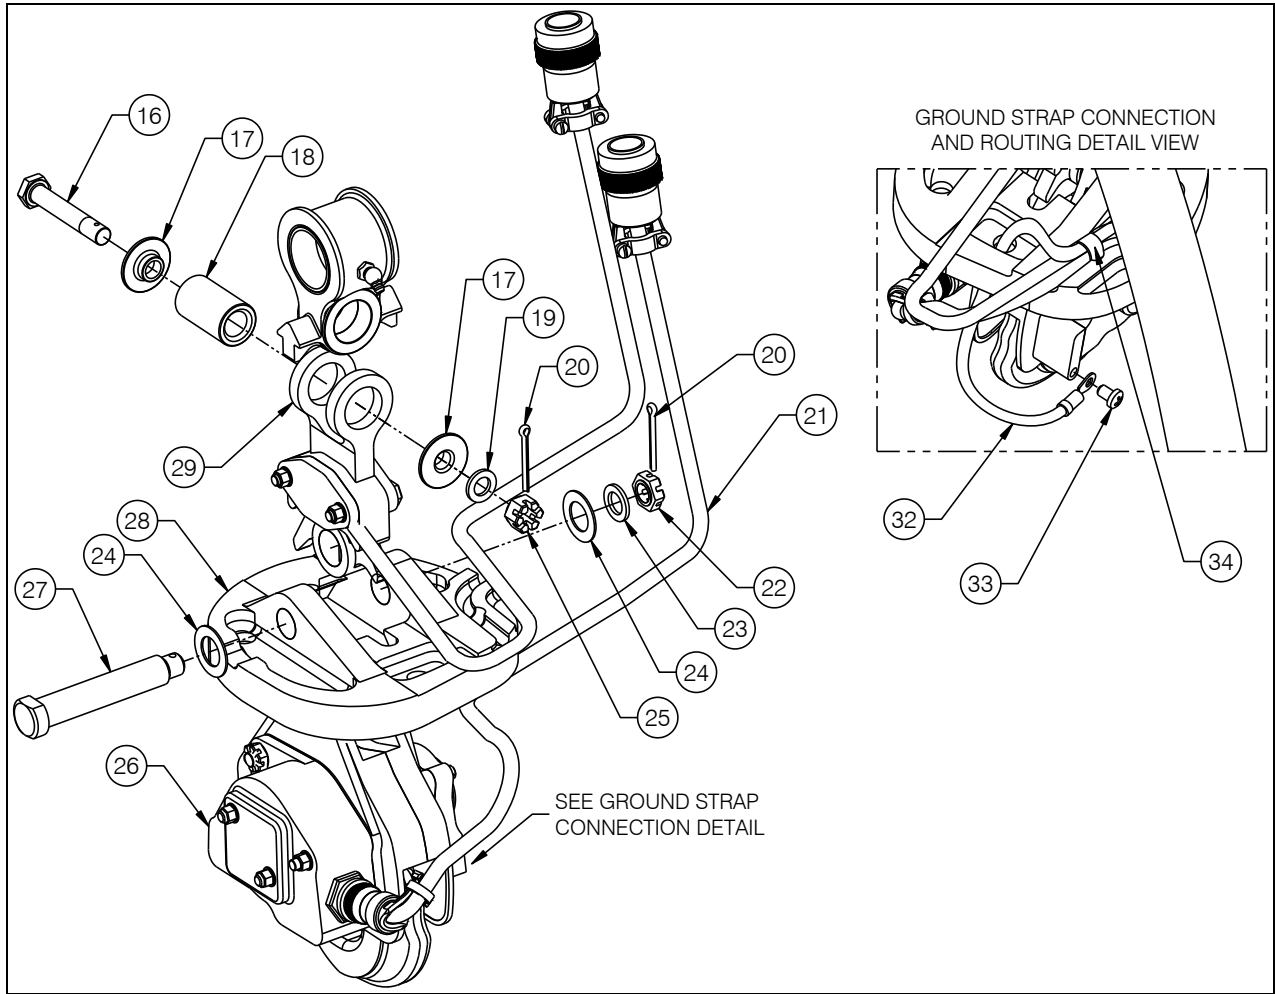

System Part Numbers continued

232-145-01 Swing Hook-Frame Assembly

Item	Part Number	Description	Qty
1	235-117-00	Swing Frame Half	2
2	590-008-00	Plastic Tubing Wrap	80"
3	510-762-00	Bolt	4
4	510-104-00	Nut	4
5	517-055-00	Spherical Bearing	4
6	510-510-00	Jam Nut	4
7	235-116-00	Frame Strut	2
8	510-440-00	Nut, Castellated	1
9	290-843-00	Shaft Cap	2
10	290-842-00	Shaft – Pivot	1
11	517-057-00	Bearing	2
12	517-058-00	Bearing	2
13	232-143-01	Loadcell/Gimbal Assembly	1
14	290-862-00	Bumper	1
15	510-506-00	Bolt	1
16	510-443-00	Bolt	1
17	290-740-00	Shaft Retaining Bushing	2
18	290-739-00	Shaft – Gimbal	1
19	510-220-00	Washer	1
20	510-178-00	Cotter Pin	3
21	270-107-00	Lower Electrical Release Cable	1
22	510-170-00	Nut	1
23	510-174-00	Washer	1
24	510-183-00	Washer	1
25	510-320-00	Nut, Castellated	1
26	528-023-01	3500 lb. Keeperless Cargo Hook	1
27	290-775-00	Long Hook Attach Bolt	1
28	290-774-00	Hook Bumper	1
29	210-249-03*	AS350 Swing Loadcell Assembly	1
30	215-183-00	Serial Number Plate	1
31	510-429-00	Drive Screw	4
32	270-126-00	Ground Strap	1
33	510-391-00	Screw	1
34	512-011-00	Ty-Wrap	2
35	215-271-00	Fuel Drain Warning Placard	1

* Supersedes 210-249-00, 210-199-01 and 210-199-00. These part numbers are interchangeable.

Section 7

Certification

FAA STC

Department of Transportation—Federal Aviation Administration

Supplemental Type Certificate

Number SR01164SE

This certificate, issued to

Onboard Systems
13915 NW 3rd Court
Vancouver, WA 98685

certifies that the change in the type design for the following product with the limitations and conditions therefor as specified hereon meets the airworthiness requirements of Part 27 of the Federal Aviation Regulations.

Original Product—Type Certificate Number:

H9EU

Make:

Eurocopter France

Model:

AS350B, AS350B1, AS350B2, AS350B3, AS350BA,
& AS350D

Description of the Type Design Change: Fabrication of Onboard Systems Model 200-280-01 Cargo Hook Swing Suspension System in accordance with FAA approved Onboard Systems Master Drawing List No. 155-086-00, Revision 10, dated September 29, 2004, or later FAA approved revision, and installation of this system in accordance with FAA approved Onboard Systems Owner's Manual No. 120-104-01, Revision 1, dated September 29, 2004, or later FAA approved revision. This modification must be inspected and maintained in accordance with Section ATA 5 of the FAA approved Onboard Systems Instructions for Continued Airworthiness Document No. 123-011-01, Revision 0, dated August 11, 2004, Onboard Systems Owner's Manual No. 120-104-01, Revision 1, dated September 29, 2004, and Onboard Systems Cargo Hook Service Manual No. 122-005-00, dated September 19, 2002, or later FAA approved revision.

Limitations and Conditions: Approval of this change in type design applies only to those Eurocopter AS350 model rotorcraft listed above.

other previously approved modifications are incorporated unless it is determined by the installer that the relationship between this change and any of those other previously approved modifications, including changes in type design, will introduce no adverse effect upon the airworthiness of that rotorcraft. Rotorcraft modified in accordance with this STC must be operated in accordance with an FAA approved copy of Onboard Rotorcraft Flight Manual Supplement (RFMS) No. 121-012-01, dated October 19, 2004, or later FAA approved revision. A copy of this Certificate, FAA approved RFMS, and Maintenance Manual must be maintained as part of the permanent records of the modified rotorcraft.

If the holder agrees to permit another person to use this certificate to alter the product, the holder shall give the other person written evidence of that permission.

This certificate and the supporting data which is the basis for approval shall remain in effect until surrendered, suspended, revoked, or a termination date is otherwise established by the Administrator of the Federal Aviation Administration.

Date of application: March 29, 2002

Date reissued:

Date of issuance: January 22, 2003

Date amended: October 26, 2004



By direction of the Administrator

Angelos Xistias

Acting Manager, Seattle Aircraft
Certification Office

(Signature)

(Title)

Any alteration of this certificate is punishable by a fine of not exceeding \$1,000, or imprisonment not exceeding 3 years, or both.

This certificate may be transferred in accordance with FAR 21.47

FAA FORM 8110-2(10-68)

Canadian Approval



Transport
Canada

Aviation

Transports
Canada

Aviation

Aircraft Certification Branch
620 - 800 Burrard Street
Vancouver, BC V6Z 2J8

Your file Votre référence
190S-03-169
Our file Notre référence

March 24, 2003

Onboard Systems
13915 NW 3rd Court
Vancouver, WA 98685
USA

Attention: Mr. Ron Pirtle

Subject: Acceptance of Foreign STCs SR01164SE, SR01165SE, and SR01166SE

Dear Sir:

This is in response to your letters dated February 25, 2003 making application for Canadian approvals of the subject STCs.

In accordance with our current policy associated with the review of foreign STCs, some STCs applicable to certain categories of rotorcraft may be accepted solely on the basis of their foreign certification, and do not require the issue of a corresponding certificate by Transport Canada. The subject STCs fall within these criteria.

These STCs will be entered in the national index of STCs that have been reviewed and accepted by Transport Canada for installation on Canadian-registered aeronautical products.

This letter confirms formal acceptance of the referenced STCs by Transport Canada. Should you require additional information with regards to this matter or clarification please do not hesitate to contact the undersigned at (604) 666-5597.

Yours truly,

H. W. Wong
Senior Engineer, Aircraft Certification

for
Minister of Transport

c.c. Mr. Jeffrey E. Duven
Acting Manager, Seattle ACO

Canada

1/1



AGÊNCIA NACIONAL DE AVIAÇÃO CIVIL - BRASIL

CERTIFICADO DE HOMOLOGAÇÃO SUPLEMENTAR DE TIPO
(Supplemental Type Certificate)

NÚMERO 2007S04-12
(Number)

Este certificado, emitido com base na Lei nº 7565 "Código Brasileiro de Aeronáutica", de 19 de dezembro de 1986,
(This certificate, issued in the basis of the Law No. 7565 "Código Brasileiro de Aeronáutica", dated 19 December 1986,

é conferido ao (à): Onboard Systems
is granted to:) 13915 NW 3rd Court
Vancouver, WA 98685
USA

por ter a modificação ao projeto de tipo do produto abaixo citado, observadas as limitações e condições
(for having the change to the type design of the product mentioned below, with the limitations and conditions therefor as)
especificadas, satisfeito aos requisitos de aeronavegabilidade aplicáveis.
(specified hereon, met the applicable airworthiness requirements.)

Produto Original - Número do Certificado de Tipo: 8812 (ANAC).
(Original Product - Type Certificate No:)

Fabricante: Eurocopter France.
(Manufacturer:)

Modelo(s): AS 350 BA, AS 350 B1, AS 350 B2 and AS 350 B3.
(Model(s):)

DESCRIÇÃO DA MODIFICAÇÃO AO PROJETO DE TIPO:
(Description of Type Design Change:)

Installation of Onboard Systems Model 200-280-01 or 200-280-02 Cargo Hook Swing Suspension System in accordance with Onboard Systems Owner's Manual No. 120-104-01, Rev. 5, dated 3 Apr. 2007 or Owner's Manual No. 120-104-02, Rev. 9, dated 3 Apr. 2007, or later approved revisions.

This CHST validates in Brazil the STC # SR01164SE, issued by FAA (USA).

LIMITAÇÕES E CONDIÇÕES:
(Limitations and Conditions:)

See continuation sheet for applicable data.

DATAS:
(Dates of:)

Do Requerimento: 21 Dec. 2006
(Application:)

Da emissão: 13 Apr. 2007
(Issue:)

Da reemissão:
(Reissue:)

CLÁUDIO PASSOS SIMÃO
Gerente Geral, Certificação de Produtos Aeronáuticos
(Manager, Aeronautical Products Certification)

MILTON ZUANAZZI
Diretor-Presidente
(Director President)



AGÊNCIA NACIONAL DE AVIAÇÃO CIVIL

Folha de Continuação ao
(Continuation Sheet to)

CERTIFICADO DE HOMOLOGAÇÃO SUPLEMENTAR DE TIPO
(Supplemental Type Certificate)

NÚMERO 2007S04-12
(Number)

LIMITAÇÕES E CONDIÇÕES:
(Limitations and Conditions:)

- I. The approval of this type design change should not be extended to other rotorcraft of these models on which other previously approved modifications are incorporated unless it is determined by the installer that the relationship between this change and any of those other previously approved modifications, including changes in Type Design, will introduce no adverse effect upon the airworthiness of that rotorcraft.
- II. If the holder agrees to permit another person to use this certificate to alter the product, the holder shall give the other person written evidence of that permission.
- III. Operation must be performed in accordance with FAA approved Rotorcraft Flight Manual Supplement (RFMS), document No. 121-012-01, Rev. 0, dated 19 Oct. 2004, or Supplement No. 121-012-02, Rev. 0, dated 2 Feb. 2005, or later approved revisions.
- IV. This modification must be inspected and maintained in accordance with section ATA 5 of the Onboard Systems Instructions for Continued Airworthiness, document No. 123-011-01, Rev. 0, dated 11 Aug. 2004, or document No. 123-011-02, Rev. 0, dated 13 Dec. 2004, and Service Manual No. 122-005-00, Rev. 9, dated 3 Jan. 2006, or Service Manual No. 122-015-00, Rev. 4, dated 6 Jul. 2006, or later approved revisions.
- V. A copy of this Certificate, Supplement and Maintenance Manual referred on items III and IV above, respectively, shall be maintained as part of the permanent records of the modified rotorcraft.

Paulo J.R. END -----



AGÊNCIA NACIONAL DE AVIAÇÃO CIVIL - BRASIL

CERTIFICADO DE HOMOLOGAÇÃO SUPLEMENTAR DE TIPO
(Supplemental Type Certificate)

NÚMERO 2007S04-11
(Number)

Este certificado, emitido com base na Lei nº 7565 "Código Brasileiro de Aeronáutica", de 19 de dezembro de 1986,
(This certificate, issued in the basis of the Law No. 7565 "Código Brasileiro de Aeronáutica", dated 19 December 1986,

é conferido ao (à): Onboard Systems
is granted to:) 13915 NW 3rd Court
Vancouver, WA 98685
USA

por ter a modificação ao projeto de tipo do produto abaixo citado, observadas as limitações e condições
(for having the change to the type design of the product mentioned below, with the limitations and conditions thereof as)
especificadas, satisfeito aos requisitos de aeronavegabilidade aplicáveis.
(specified hereon, met the applicable airworthiness requirements.)

Produto Original - Número do Certificado de Tipo: 84 (FN 157) (DGAC France)
(Original Product - Type Certificate No:)

Fabricante: Eurocopter France.
(Manufacturer:)

Modelo(s): AS 350 B.
(Model(s):)

DESCRIÇÃO DA MODIFICAÇÃO AO PROJETO DE TIPO:
(Description of Type Design Change:)

Installation of Onboard Systems Model 200-280-01 or 200-280-02 Cargo Hook Swing Suspension System in accordance with Onboard Systems Owner's Manual No. 120-104-01, Rev. 5, dated 3 Apr. 2007 or Owner's Manual No. 120-104-02, Rev. 9, dated 3 Apr. 2007, or later approved revisions.

This CHST validates in Brazil the STC # SR01164SE, issued by FAA (USA).

LIMITAÇÕES E CONDIÇÕES:
(Limitations and Conditions:)

See continuation sheet for applicable data.

DATAS:
(Dates of:)

Do Requerimento: 21 Dec. 2006
(Application:)

Da emissão: 13 Apr. 2007
(Issue:)

Da reemissão:
(Reissue:)

CLÁUDIO PASSOS SIMÃO
Gerente Geral, Certificação de Produtos Aeronáuticos
(Manager, Aeronautical Products Certification)

MILTON ZUANAZZI
Diretor-Presidente
(Director-President)



AGÊNCIA NACIONAL DE AVIAÇÃO CIVIL

Folha de Continuação ao
(Continuation Sheet to)

CERTIFICADO DE HOMOLOGAÇÃO SUPLEMENTAR DE TIPO
(Supplemental Type Certificate)

NÚMERO 2007S04-11
(Number)

LIMITAÇÕES E CONDIÇÕES:
(Limitations and Conditions:)

- I. The approval of this type design change should not be extended to other rotorcraft of these models on which other previously approved modifications are incorporated unless it is determined by the installer that the relationship between this change and any of those other previously approved modifications, including changes in Type Design, will introduce no adverse effect upon the airworthiness of that rotorcraft.
- II. If the holder agrees to permit another person to use this certificate to alter the product, the holder shall give the other person written evidence of that permission.
- III. Operation must be performed in accordance with FAA approved Rotorcraft Flight Manual Supplement (RFMS), document No. 121-012-01, Rev. 0, dated 19 Oct. 2004 or Supplement No. 121-012-02, Rev. 0, dated 2 Feb. 2005, or later approved revisions.
- IV. This modification must be inspected and maintained in accordance with section ATA 5 of the Onboard Systems Instructions for Continued Airworthiness, document No. 123-011-01, Rev. 0, dated 11 Aug. 2004 or document No. 123-011-02, Rev. 0, dated 13 Dec. 2004, and Service Manual No. 122-005-00, Rev. 9, dated 3 Jan. 2006 or Service Manual No. 122-015-00, Rev. 4, dated 6 Jul. 2006, or later approved revisions.
- V. A copy of this Certificate, Supplement and Maintenance Manual referred on items III and IV above, respectively, shall be maintained as part of the permanent records of the modified rotorcraft.

----- *Handwritten signature* *Handwritten initials* ----- **END** -----

Brazilian CHST continued

Required Placards

Install one of the following per section 2.8.

This document when released outside Orboard Systems is supplied for identification, engineering evaluation, or inspection purposes only and shall not be duplicated, used or disclosed to produce articles and/or subject matter covered thereby without the written permission of Orboard Systems. By accepting this document, the recipient agrees to affix this legend to any duplication of reproduction, in whole or part of the document of information disclosed thereby pursuant to such permission.

For a description of any revisions see document number 150-066-00.

38 POINT FONT
COLOR TO CONTRAST
WITH BACKGROUND.

MATERIAL: 3M SCOTCHCAL 3650 VINYL OR EQUIVALENT.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE					TITLE	
±.03 LINEAR	±0.5 DEG. ANGLES	+.005 -.001 HOLES	DRN	CHK	REVISED	REF
			04/03/07	MH		215-200-00
					SCALE	SIZE
					SHEET	1 OF 1
						REV 0

This document when released outside Orboard Systems is supplied for identification, engineering evaluation, or inspection purposes only and shall not be duplicated, used or disclosed to produce articles and/or subject matter covered thereby without the written permission of Orboard Systems. By accepting this document, the recipient agrees to affix this legend to any duplication of reproduction, in whole or part of the document of information disclosed thereby pursuant to such permission.

For a description of any revisions see document number 150-066-00.

38 POINT FONT
COLOR TO CONTRAST
WITH BACKGROUND

MATERIAL: 3M SCOTCHCAL 3650 VINYL OR EQUIVALENT

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE					TITLE	
±.03 LINEAR	±0.5 DEG. ANGLES	+.005 -.001 HOLES	DRN	CHK	REVISED	REF
			04/03/07	MH		215-201-00
					SCALE	SIZE
					SHEET	1 OF 1
						REV 0

Brazilian CHST continued

Required Placards continued

Install the following per section 2.8.

This document when released outside Onboard Systems is supplied for identification, engineering evaluation, or inspection purposes only and shall not be duplicated, used or disclosed to produce articles and/or subject matter covered thereby without the written permission of Onboard Systems. By accepting this document, the recipient agrees to affix this legend to any duplication of reproduction, in whole or part of the document of information disclosed thereby made pursuant to such permission.

For a description of any revisions see document number 150-066-00.

1.88 IN.
(48 MM)

0.28 IN.
(7 MM)

SOLTA-CARGA

12 POINT FONT
COLOR: WHITE

BLACK BACKGROUND

MATERIAL: 3M SCOTCHCAL 3650 VINYL OR EQUIVALENT.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE		+.005 -.001 HOLES	
		±.03 LINEAR	±0.5 DEG. ANGLES

		TITLE	
DRN	04/03/07	MH	CARGO RELEASE PLACARD
CHK		REF	215-202-00
REVISED		SCALE	SIZE
		SHEET	1 OF 1
		REV	0



European Aviation Safety Agency

SUPPLEMENTAL TYPE CERTIFICATE

EASA.IM.R.S.01324

This certificate, established in accordance with Regulations (EC) No 1592/2002 and (EC) No 1702/2003 and issued to:

Onboard Systems International
13915 NW 3rd Court
98685 Vancouver
Washington
USA

certifies that the change in the type design for the product listed below with the limitations and conditions specified meets the applicable type certification basis and environmental protection requirements when operated within the conditions and limitations specified below:

Original Product Type Certificate number: *EASA TCDS EASA.R.008*

Manufacturer: *Eurocopter*

Model: *Eurocopter France AS 350 B, Eurocopter France AS 350 B1, Eurocopter France AS 350 B2, Eurocopter France AS 350 B3, Eurocopter France AS 350 BA, Eurocopter France AS 350 D*

Original STC Number: *FAA STC SR01164SE*

Description of Design Change:

External Load Swing Suspension System model 200-280-01 (with Keeperless Cargo Hook) and model 200-280-02 (with Hydraulic Cargo Hook).

This STC is the validation of the FAA STC SR01164SE issued on 22 January 2003 and last amended on 02/04/05.



European Aviation Safety Agency

Associated Technical Documentation:

Definition and installation:

- Onboard Systems Master Drawing List No. 155-086-00, Rev. 11 dated January 21, 2005 approved by FAA, or later FAA approved revisions.
- Onboard Systems Owner's Manual No. 120-104-01 (for system model 200 280 01), Rev. 1 dated September 29, 2004 approved by FAA or
- No. 120-104-02 (for system model 200 280 02), Revision 0 dated January 20, 2005 approved by FAA, or later FAA approved revisions.

Inspection and maintenance:

- Onboard Systems Instructions for Continued Airworthiness No. 123 011-01 (for system model 200 280 01), Rev. 0 dated August 11, 2004 approved by FAA or
- No. 123 011-02 (for system model 200 280 02), Rev. 0 dated December 13, 2004 approved by FAA and
- Onboard Systems Service Manual No. 122 005-00 (for Keeperless Cargo Hook), Rev. 7 dated October 10, 2003 approved by FAA or
- No. 122-015-00 (for Hydraulic Cargo Hook), Rev. 0 dated January 20, 2005 approved by FAA, or later FAA approved revisions.

Operation:

- Onboard Systems RFMS No. 121-012-01 (for system model 200 280 01), Rev. 2 dated June 12, 2007 approved by FAA or
- No. 121-012-02 (for system model 200-280-02) Rev. 2 dated June 12, 2007 approved by FAA, or later FAA approved revisions.

Limitations and Conditions:

1. EASA-approved AS350 Flight Manual and <External Load Transport: Cargo Swing> FM supplement are required.
2. This STC is approved only for the product configuration as defined in the approved design data referred to in the paragraph "Description". Compatibility with other aircraft/engine configurations shall be determined by the installer.
3. Installation and operation of the system on AS350B3 with the modification OP-3369 incorporated is not approved.




European Aviation Safety Agency

4. Prior to installation of this modification the installer must determine that the interrelationship between this modification and any other previously installed modification will introduce no adverse effect upon the airworthiness of the product. The installation of this modification by third persons is subject to written permission of the approval holder.

This certificate shall remain valid unless otherwise surrendered or revoked.

For the European Aviation Safety Agency,
Date of Issue: 14 June 2007


✍ Massimo Mazzoletti
Certification Manager
Rotorcraft, Balloons & Airships